

INSTALLATION GUIDE:

RING PENDANT
990.0342.01




IMPORTANT:
The luminaire must not be covered by any debris or insulating material. Ensure there is a minimum of 50 mm airspace around the luminaire. Electrical termination must be carried out by a qualified electrician in accordance with the latest edition of IEE wiring regulations BS7671.



PLEASE RETAIN THIS GUIDE FOR FUTURE REFERENCE AND RECYCLE PACKAGING.

A ISOLATE MAINS SUPPLY BEFORE COMMENCING INSTALLATION

600 mm luminaire
(3 mounting points)



1200 mm luminaire
(4 mounting points)





6 kg - 600 mm luminaire

15.6 kg - 1200 mm luminaire

ENSURE MOUNTING SURFACE IS CAPABLE OF SUSPENDING THE WEIGHT OF THE LUMINAIRE


- Disassemble ceiling mounts (1), then attach to ceiling as indicated using suitable fixings (2) in desired location.
- Install ceiling rose using suitable fixings adjacent to a ceiling mount for power connection point (3).

B

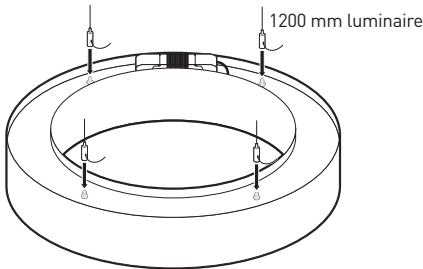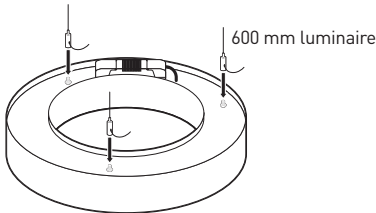

- Screw suspension clutches on to studs on the back of luminaire. Three suspension clutches for 600 mm luminaire or four for 1200 mm luminaire.

C



- Reassemble ceiling mounts.
- Raise luminaire to the desired height.
- Connect the luminaire to the mains supply using a terminal block (not supplied) compliant with the requirements of EN60998-2-1 or 2-2.



REINSTATE MAINS SUPPLY