

INSTALLATION GUIDE:

150 mm LED SCOOP
990.0383.01



IMPORTANT:

The luminaire must not be covered by any debris or insulating material. Ensure there is a minimum of 50 mm airspace around the luminaire and control gear. Electrical termination must be carried out by a qualified electrician in accordance with the latest edition of IEE wiring regulations BS7671.


NOTE: THE LED MODULES IN THIS LUMINAIRE ARE NON-USER REPLACEABLE.

PLEASE RETAIN THIS GUIDE FOR FUTURE REFERENCE AND RECYCLE PACKAGING.

A




ISOLATE MAINS SUPPLY BEFORE COMMENCING INSTALLATION




- Cut a 140 mm circular hole at the desired location using a holesaw.

B

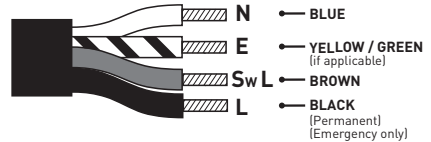


- Connect the luminaire to the mains supply using a terminal block (not supplied) compliant with the requirements of EN60998-2-1 or 2-2.
- For Touch & Dim wiring see instruction leaflet **990.0009.01**.
- For DALI wiring see instruction leaflet **990.0028.01**.

C



- Offer the driver into the ceiling void.


D

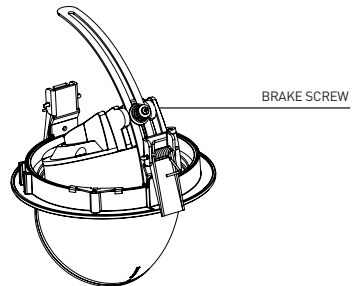

- Adjust the luminaire head to the required position. The head resistance can be adjusted using the brake screw if necessary.

E

- Tension both springs into the upright position and offer the luminaire up into the hole in the ceiling.

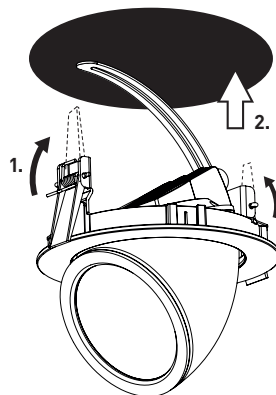

REINSTATE MAINS SUPPLY