

LINEAR LUMINAIRE / TRIDONIC / SURFACE OR SUSPENDED / UK MADE

# Brilliance

Direct extruded linear LED luminaire for surface mount or suspension fixing.

Brilliance is an extruded linear profile luminaire for commercial interiors where clean direct light, Tridonic LED and driver components and long linear runs are required.

The range includes four standard lengths, TPa opal lens, low-glare prismatic lens option, output options and accessories for suspension or butt-joint installation.




<p><b>Surface or suspended</b> Suitable for surface mount or suspension fixing.</p>	<p><b>Tridonic platform</b> Tridonic low-energy LED and driver system.</p>	<p><b>Lens options</b> TPa opal lens with low-glare prismatic option.</p>	<p><b>&gt;72,000h life</b> Life up to more than 72,000 hours L80/F10.</p>
---	--	---	---

## Key Features

- + Direct, extruded linear profile luminaire
- + Finished in RAL 9006 grey as standard
- + Delivering approx. 2200 l/m per meter as standard
- + TPa opal lens for feature, general and visual areas
- + Tridonic low energy LED and driver system
- + Suitable for surface mount or suspension fixing
- + Available in 4 standard lengths
- + Coloured matched, injection moulded end caps
- + Low glare prismatic lens available for office and LG7 compliance
- + Manufactured in the UK

## Technical Drawing

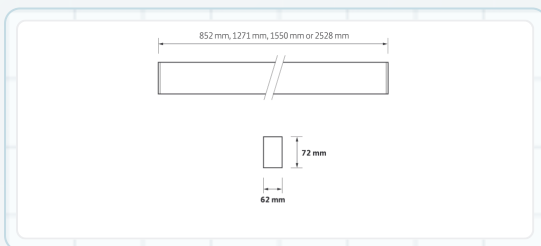

Lengths <b>852 / 1271 / 1550 / 2528 mm</b>	Width <b>62 mm</b>
Height <b>72 mm</b>	

## Ordering Information

LENGTH	COLOUR TEMP	OUTPUT STD	MODEL REF.	OUTPUT /LO	OUTPUT /HO
850 mm	3000K	1725	<b>BRILLIANCE.001</b>	1175	2725
850 mm	4000K	1825	<b>BRILLIANCE.002</b>	1225	2875
1.2 m	3000K	2575	<b>BRILLIANCE.003</b>	1750	4100
1.2 m	4000K	2725	<b>BRILLIANCE.004</b>	1850	4300
1.5 m	3000K	3150	<b>BRILLIANCE.005</b>	2150	5000
1.5 m	4000K	3325	<b>BRILLIANCE.006</b>	2250	5250
2.5 m	3000K	5150	<b>BRILLIANCE.007</b>	3500	8175
2.5 m	4000K	5425	<b>BRILLIANCE.008</b>	3675	8575








## Options

<b>/WH</b> White body	<b>/BK</b> Black body	<b>/LO</b> Lower output
<b>/HO</b> Higher output	<b>/ECO</b> SwitchDIM, DALI or DSI	<b>/EMI</b> EM conversion (not BRILLIANCE.001 / BRILLIANCE.002)
<b>/LG</b> Low glare prismatic lens		






# Specification Options and Accessories

options, accessories and product-variation choices for Brilliance schedules.




## Options




 <p><b>/WH</b> White body</p>	 <p><b>/BK</b> Black body</p>	 <p><b>/LO</b> Lower output</p>	 <p><b>/HO</b> Higher output</p>
 <p><b>/ECO</b> SwitchDIM, DALI or DSI</p>	 <p><b>/EMI</b> EM conversion (not BRILLIANCE.001 / BRILLIANCE.002)</p>	 <p><b>/LG</b> Low glare prismatic lens</p>	

## Accessories

 <p><b>BRILLIANCE .ACC. 01</b> 2M 2pcs suspension kit (not 2.5 m)</p>	 <p><b>BRILLIANCE .ACC. 02</b> 2M 3pcs suspension kit (for 2.5 m)</p>	 <p><b>BRILLIANCE .ACC. 03</b> 180 degree butt joint bracket</p>	 <p><b>BRILLIANCE .ACC. 04</b> 90 degree butt joint bracket</p>
 <p><b>BRILLIANCE .ACC. 05</b> Diffuser removal tool</p>			

## Product Variations

 <p><b>PV</b> Other colours and specifications available on request</p>	 <p><b>PV - Contact Sales</b> Custom colours - blue example</p>	 <p><b>PV - Contact Sales</b> Custom colours - red example</p>
--	--	--

		<p>UK CA</p>	<p>CE</p>		<p>DC</p>	<p>Declaration of Conformity available</p>
---	---	------------------	-----------	---	-----------	--

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25 deg C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E5DE.