

EXIT SIGNS / WALL MOUNTED / DOUBLE SIDED





Double-Sided Wall Exit Sign

Maintained wall-mounted LED exit sign with EU and ISO legend-panel options.

This wall-mounted sign is listed for 3 hour maintained operation with 12 high-intensity LEDs and a screen-printed opal polycarbonate legend panel.

The source file lists EU and ISO legend choices, a DALI / self-test option, and a wall mounting bracket.




 <p>3 hour duration Rated emergency duration is listed as 3 hours.</p>	 <p>EU and ISO legends The file lists both EU and ISO legend-panel options.</p>	 <p>DALI / self-test The source sheet lists /EMD as an available option.</p>	 <p>Wall bracket Wall mounting bracket is listed as part of the product.</p>
--	---	--	--

Key Features

- + 3 hour maintained operation
- + Screen-printed opal polycarbonate legend panel
- + Wall mounting bracket
- + 12 high-intensity LEDs for bright, even legend illumination
- + ISO legend panels also available
- + DALI / self-test version available

Technical Drawing

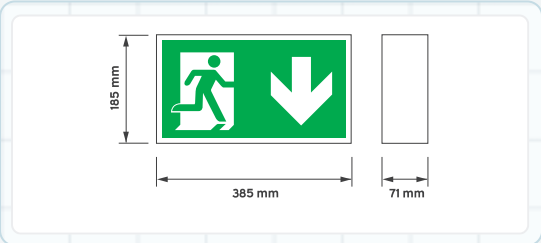




Length	Height
385 mm	185 mm
Depth	
71 mm	

Ordering Information

FINISH	DURATION	RECHARGE	LIFETIME	MODEL REF.
White	3 hours	24 hours	50,000 hours	DOUBLESIDEDWALLEXITSIGN.001

Options

CONTROL /EMD	EU LEGENDS LXSR, LXSL, LXSWBUP	ISO LEGENDS LXSR/ISO, LXSL/ISO, LXSWBUP/ISO, LXSWBAD/ISO
------------------------	--	--

		UK CA	CE		DC	Declaration of Conformity available
---	---	-------	----	---	----	-------------------------------------

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25 deg C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E5DE.