


PANELS / EDGE-LIT / LOW GLARE / PHILIPS







Edge-Lite

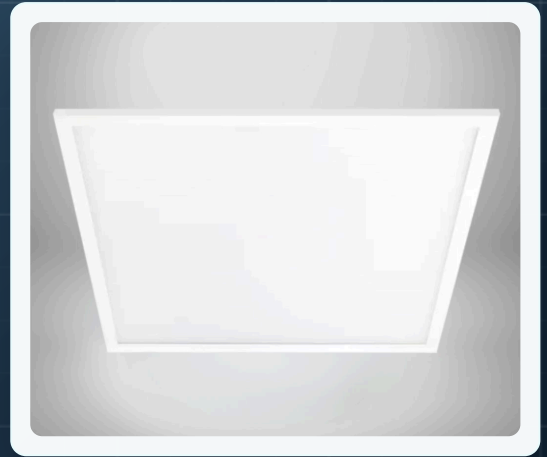Edge-lit 600 x 600 modular panel for offices and classrooms with controlled UGR<19 comfort.

Edge-Lite is a low-glare edge-lit LED panel for educational and commercial spaces.

The Philips-powered platform provides UGR<19 comfort, 3 step MacAdam colour tolerance, long service life and practical mounting options for commercial ceilings.




 <p>High visual comfort UGR<19 performance supports high-quality spaces such as schools and offices.</p>	 <p>Long service life Life above 50,000 hours (L80 / B10).</p>	 <p>Range of controls DALI, dimming, wireless and emergency options are listed for the range.</p>	 <p>Durable light quality Colour rendering above Ra80 with good colour consistency for office environments.</p>	 <p>Flexible mounting Surface-mounted, plasterboard and suspended variants are supported.</p>	 <p>5 year warranty The specification data lists a 5 year warranty for the panel range.</p>
---	--	---	---	---	---

Key Features

- + 600 x 600 edge-lit LED panel powered by Philips.
- + Colour rendering >Ra80 for office applications.
- + Life >50,000 hours L80/B10.
- + Bespoke image panels available for individual or groups of luminaires.
- + 5 year warranty.
- + UGR<19 low glare for LG7 compliance.
- + 3 step MacAdam colour tolerance (3SSDCM).
- + DALI, dimming, wireless control and emergency options.
- + Surface-mounted, plasterboard and suspended accessory options.

Dimensions

PRODUCT DRAWING

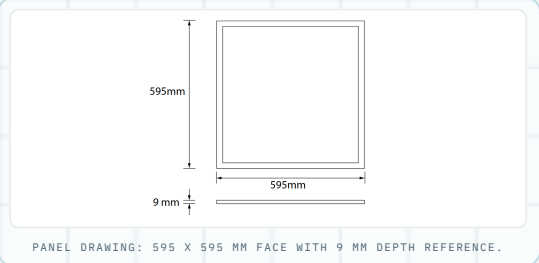

PANEL DRAWING: 595 X 595 MM FACE WITH 9 MM DEPTH REFERENCE.

Drawing reference EDGE-LITE.001 to EDGE-LITE.006	Face size 595 x 595 mm
Depth 9 mm	

Ordering Information

OUTPUT (LLM)	COLOUR TEMP	POWER (TCW)	EFFICACY (LLM/TCW)	MODEL REF.
3400 11m	3000K	29W	119	EDGE-LITE.001
3550 11m	4000K	29W	125	EDGE-LITE.002
4075 11m	3000K	35W	116	EDGE-LITE.003
4250 11m	4000K	35W	121	EDGE-LITE.004
4500 11m	3000K	39W	115	EDGE-LITE.005
4700 11m	4000K	39W	121	EDGE-LITE.006
















Options

<p>CONTROL GEAR /T+DALI, /MC, /BTC</p>	<p>EMERGENCY /EM, /EMS, /EMP</p>	<p>ACCESSORIES EDGE-LITE.ACC.01, EDGE-LITE.ACC.02, EDGE-LITE.ACC.03, EDGE-LITE.ACC.04</p>
<p>PRODUCT VARIATIONS PV - Contact Sales</p>		

Specification Options

Controls, emergency conversions, mounting accessories and product variation choices for Edge-Lite project schedules.

Specification options and accessories

 <p>/T+DALI Touch dimming or DALI driver</p>	 <p>/MC Philips MasterConnect wireless control driver</p>	 <p>/BTC Casambi wireless control driver</p>	 <p>EDGE-LITE.ACC.05 Wireless Casambi single wall switch</p>	 <p>EDGE-LITE.ACC.06 Wireless Casambi twin wall switch</p>
 <p>/EM 3hr emergency</p>	 <p>/EMS 3hr self-test emergency</p>	 <p>/EMP 3hr DALI emergency</p>	 <p>EDGE-LITE.ACC.01 Surface mounting kit</p>	 <p>EDGE-LITE.ACC.02 Plasterboard mounting kit</p>
 <p>EDGE-LITE.ACC.03 Suspension kit</p>	 <p>EDGE-LITE.ACC.04 SAS-150 concealed T-frame mount RAL9010</p>	 <p>PV - Contact Sales Plug & Play Choice of connectors</p>	 <p>PV - Contact Sales Illuminated image panels - printed image option Printed image panel artwork</p>	 <p>PV - Contact Sales Illuminated image panels - louvre option Decorative louvre artwork</p>

		UK CA	CE		DC	Declaration of Conformity available
--	--	----------	----	--	----	-------------------------------------

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification. EgOE.