


TRACK SPOTLIGHTS / VOSSLOH / DALI / WIRELESS

Focal Track

Professional minimalist LED track mounted spotlight with interchangeable accessories.

Focal Track is designed for accent, retail and display applications where a compact track-mounted spotlight needs flexible optical control.


The source sheet lists white as standard with a black body option, beam lenses, Ra90, DALI, mains dimming, wireless control, snoots, honeycomb louvre, barn doors and project variation support.

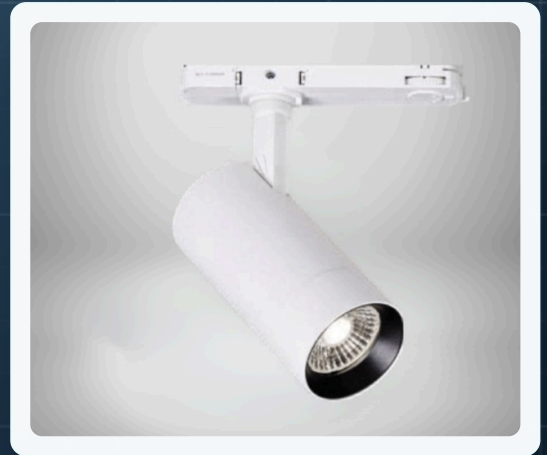

Key Features

- + Professional minimalist LED track mounted spotlight.
- + Vossloh LED and in-track driver system.
- + 18 deg, 24 deg and 50 deg lens options.
- + MacAdam colour tolerance 3 SDCM.
- + Range of interchangeable accessories available.
- + Finished in white as standard with black option.
- + 40 deg medium beam lens as standard.
- + Ra80 with Ra90 option.
- + DALI and wireless control options.
- + 5 year warranty.

Dimensions

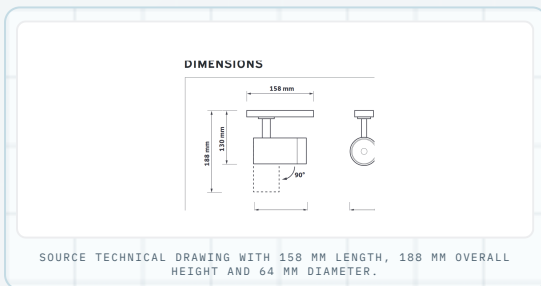

Body length
158 mm

Overall height
188 mm

Vertical body
130 mm

Diameter
64 mm

Rotation
90 deg

Ordering Information

LUMINAIRE OUTPUT (LLM)	COLOUR	LUMINAIRE POWER (TCW)	LUMINAIRE EFFICACY (LLM/TCW)	MODEL REF.
1500	3000K	11.0	136	FOCALTRACK.001/L0
1550	4000K	11.0	141	FOCALTRACK.002/L0
1825	3000K	14.0	130	FOCALTRACK.001
1875	4000K	14.0	133	FOCALTRACK.002
2350	3000K	20.5	115	FOCALTRACK.003
2425	4000K	20.5	118	FOCALTRACK.004
2725	3000K	26.5	102	FOCALTRACK.005
2800	4000K	26.5	105	FOCALTRACK.006

Options

FINISH

/BK

BEAM OPTIONS

/SNB, /NB, /WB

CONTROL GEAR

/MDIM, /DALI, /BTC

ACCESSORIES

/HC, /LSW, /LSB, /ASW, /ASB, /BD















HIGH COLOUR RENDERING




/R9

PRODUCT VARIATIONS

PV - Contact Sales


Specification Options

 <p>/BK Black</p>	 <p>/HC Honeycomb louvre</p>	 <p>/MDIM Mains dimming</p>	 <p>/DALI DALI control gear</p>	 <p>/BTC Casambi wireless network (inc. dim)</p>
 <p>/R9 Ra90 high colour rendering LED module</p>	 <p>/SNB 18 deg super narrow beam</p>	 <p>/NB 24 deg narrow beam</p>	 <p>/WB 50 deg wide beam</p>	 <p>/LSW Long snoot White</p>
 <p>/LSB Long snoot Black</p>	 <p>/ASW Asymmetric adjustable snoot - White</p>	 <p>/ASB Asymmetric adjustable snoot - Black</p>	 <p>/BD Barn doors Black</p>	

		<p>UK CA</p>	<p>CE</p>		<p>DC</p>	<p>Declaration of Conformity available</p>
---	---	------------------	-----------	---	-----------	--

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25 deg C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E5DE.

Product Variations




PV - Contact Sales
Tunable white for HCL


Related Products




Vantage
Up to 5000 lm output




Iris Track
Zoom snoot




Shapex Track
Framing projector









FOCALTRACK.ACC.01
See Stucchi OneTrack datasheet



FOCALTRACK.ACC.02
Wireless Casambi single wall switch



FOCALTRACK.ACC.03
Wireless Casambi twin wall switch

      Declaration of Conformity available

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25 deg C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E5DE.