

RECESSED / IP54 / COMMERCIAL DOWNLIGHT

# Lumi

Low-profile IP54 downlight with a recessed opal diffuser for architectural commercial interiors.

Lumi is a discreet commercial downlight for projects that need a clean low-profile bezel, opal diffuser and simple specification across a switchable CCT platform. The design uses a Tridonic-powered SMD LED engine with a white RAL 9016 bezel.

The range covers four model references from 1475 to 3500 luminaire lumens, with emergency, DALI, phase-cut dimming and Casambi wireless control options available through the suffix system.



<p><b>IP54 rated</b> Designed for professional commercial downlight applications.</p>	<p><b>Opal diffuser</b> Recessed opal PC diffuser for a soft visible aperture.</p>	<p><b>Tridonic powered</b> SMD LED platform powered by Tridonic.</p>	<p><b>Up to 172 lm/W</b> Highest listed light-source efficacy in the source table.</p>	<p><b>50,000h L70</b> Long-life performance stated in the source features.</p>	<p><b>Controls ready</b> Dimming, DALI and wireless network control suffix options.</p>
---	--	--	--	--	---

## Key Features

- Professional IP54 commercial downlight.
- SMD LED powered by Tridonic.
- Switchable 3000K, 4000K and 5600K colour temperatures.
- Emergency, DALI, dimming and wireless network control options.
- Recessed opal PC diffuser.
- Bezel finished in RAL 9016 white.
- Long life 50,000 hours L70.
- 5 year warranty.

## Dimensions

PRODUCT DRAWING

DRAWING: 228 MM BEZEL, 200 MM CUT-OUT AND 45 MM DEPTH.

Bezel	228 mm	Cut-out	200 mm
Depth	45 mm		

## Ordering Information

LUMINAIRE OUTPUT (LM)	COLOUR TEMP	LUMINAIRE POWER (TCW)	LIGHT SOURCE EFFICACY (LM/W)	LUMINAIRE EFFICACY (LM/TCW)	MODEL REF.
1625	3000K	13.5	172	120	LUMI.001
1625	4000K	13.0	172	125	LUMI.001
1475	5600K	13.5	154	109	LUMI.001
2250	3000K	19.0	160	118	LUMI.002
2275	4000K	18.5	163	123	LUMI.002
2025	5600K	19.5	144	107	LUMI.002
2625	3000K	23.0	152	114	LUMI.003
2700	4000K	22.0	157	123	LUMI.003
2350	5600K	23.0	137	102	LUMI.003
3325	3000K	31.5	142	106	LUMI.004
3500	4000K	30.0	149	117	LUMI.004
3025	5600K	31.5	130	96	LUMI.004

## Options


<b>CONTROL GEAR</b> /MDIM, /ECO, /BTC	<b>EMERGENCY - REMOTE INDICATOR</b> /EM, /EMD	<b>PRODUCT VARIATION</b> PV - Contact Sales
--	--	--

# Specification Options


Control, emergency and connector options shown in the current product data.

REV1 / MAY 2026  
LL-LUMI-DS

## Specification Options


 <p><b>/MDIM</b> Phase-cut mains dimming</p>	 <p><b>/ECO</b> SwitchDIM / DALI / DSI</p>	 <p><b>/BTC</b> Casambi wireless network inc. dimming</p>	 <p><b>/EM</b> Emergency Remote indicator</p>	 <p><b>/EMD</b> DALI / Self test EM Remote indicator</p>
---	---	--	---	---

## Product Variations

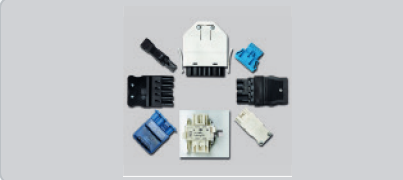


**PV - Contact Sales**  
Choice of connectors

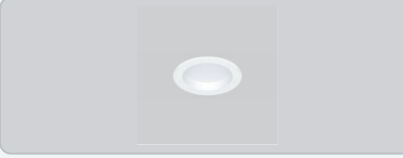

## Related Products

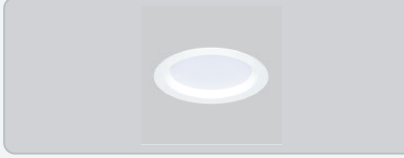

**Nova**  
110 mm downlight



**Lumi**  
190 mm downlight

	<p>CE</p>	<p>UK CA</p>		<p>DC</p>	<p>Declaration of Conformity available</p>
---	-----------	------------------	---	-----------	--

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25 deg C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E5DE.