

AeroLux

Professional minimal LED downlight with a low-profile bezel, faceted reflector and low-glare light distribution.




750-775 lm
STANDARD OUTPUT

8 W
LUMINAIRE POWER

3000 / 4000 K
LED COLOUR

>50,000 h
L70 / F50

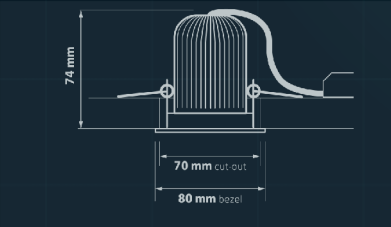

BEZEL
80 mm

CUT-OUT
70 mm

OVERALL HEIGHT
74 mm

MOUNTING
Recessed

01 Output selection

TWO STANDARD COLOUR-TEMPERATURE SELECTIONS ARE AVAILABLE.

SELECTION	OUTPUT	POWER	LED COLOUR	FINISH
Warm white	750 lm	8 W	3000 K	White RAL 9003
Neutral white	775 lm	8 W	4000 K	White RAL 9003

Output, power and colour-temperature values are source data.

02 Configure AeroLux

CONTROL, EMERGENCY AND CUSTOM CONFIGURATION CHOICES ARE AVAILABLE FOR SELECTION.

AVAILABLE OPTION DETAILS					CONTROL		EMERGENCY / CUSTOM	
					/MDIM	Phase-cut mains dimming	/EM	3-hour emergency
/MDIM Phase-cut dimming	/ECO Control	/BTC Casambi	/EM 3-hour emergency	/EMD Self-test / DALI	/ECO	SwitchDIM, DALI or DSI	/EMD	3-hour self-test and DALI emergency
					/BTC	Casambi wireless network	CUSTOM	Plug/socket and RAL colour variations

PRODUCT VARIATIONS

/MDIM phase-cut dimming · /ECO control · /BTC Casambi · /EM emergency · /EMD self-test and DALI emergency.

DOCUMENT

Technical data
REV 1

OPTICAL

36 degree faceted reflector for efficient, low-glare lighting.

CONSTRUCTION

Die-cast low-profile bezel in white RAL 9003.

FLICKER

No visible flicker to IEEE PAR1789 2015.

WARRANTY

Five-year warranty stated in the governing data.