

Aspect

Perimeter wall wash downlight for focused commercial interior lighting.



1050-4700 lm

PRODUCT OUTPUT

9.5-46.5 W


STANDARD POWER

3000 / 4000 K

LED COLOUR

IP54 / IP65

PROTECTION OPTIONS

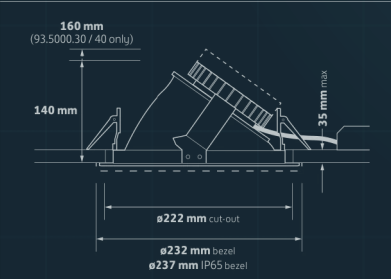

CUT-OUT

222 mm

BEZEL

232 mm

IP65 BEZEL

237 mm

HEIGHT

140 mm

01 Output selection

MODELS	OUTPUT	POWER	LED COLOUR	PROTECTION
ASPECT.001 / .002	1050 / 1150 lm	9.5 W	3000 / 4000 K	IP54
ASPECT.003 / .004	1825 / 1975 lm	17.5 W	3000 / 4000 K	IP54
ASPECT.005 / .006	2775 / 3025 lm	30.5 W	3000 / 4000 K	IP54
ASPECT.007 / .008	4325 / 4700 lm	46.5 W	3000 / 4000 K	IP54

FOUR OUTPUT LEVELS IN 3000 K AND 4000 K VERSIONS.

IP65 protection requires the compatible bezel option.

02 Configure Aspect

PROTECTION, CONTROL AND EMERGENCY OPTIONS ARE AVAILABLE FOR SELECTION.

AVAILABLE OPTION DETAILS					PROTECTION / CONTROL		EMERGENCY	
					/54	IP54 sealed lens	/EM	Remote indicator
/54	/T+DALI	/BTC	/EM	/EMI	/65	IP65 with bezel	/END	DALI or self-test remote indicator
IP54	Control	Casambi	Emergency	Emergency	/T+DALI	Touch dimming or DALI	/ENI	Integral indicator
					/BTC	Casambi wireless control	/ENDI	DALI or self-test integral indicator

PRODUCT VARIATIONS

/54 sealed lens · /65 IP65 bezel · /T+DALI control · /BTC Casambi · /EM, /EMD, /EMI and /EMDI emergency options.

DOCUMENT

Technical data
REV 1

OPTICAL	OUTPUT	PROTECTION	CONTROL
Perimeter wall wash downlight for commercial interiors.	1050 lm to 4700 lm product output range.	IP54 as standard; IP65 option with compatible bezel.	Touch dimming, DALI and Casambi control options.