

Aurora

Low-glare 600 x 600 LED panel for commercial interior applications.




2425-4200 lm
PRODUCT OUTPUT

19-32 W
STANDARD POWER

3000 / 4000 K
LED COLOUR

595 x 595 mm
PANEL FORMAT

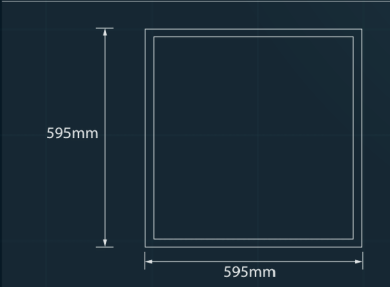

LENGTH
595 mm

WIDTH
595 mm

FORMAT
600 x 600

MOUNTING
Recessed

01 Output selection

THREE OUTPUT LEVELS IN 3000 K AND 4000 K VERSIONS.

MODELS	OUTPUT	POWER	LED COLOUR	FORMAT
AURORA.001 / .002	2425 / 2575 lm	19 W	3000 / 4000 K	600 x 600
AURORA.003 / .004	3100 / 3300 lm	24.5 W	3000 / 4000 K	600 x 600
AURORA.005 / .006	3975 / 4200 lm	32 W	3000 / 4000 K	600 x 600

LED colour and electrical values vary by selected model.

02 Configure Aurora

CONTROL, COLOUR RENDERING AND EMERGENCY OPTIONS SUPPORT PROJECT SELECTION.

AVAILABLE OPTION DETAILS

 /T+DALI
Control

 /MC
Wireless

 /BTC
Casambi

 /R9
CRI

 /EM
Emergency

CONTROL / COLOUR

/T+DALI Touch dimming or DALI driver

/MC MasterConnect wireless control

/BTC Casambi wireless control

/R9 High colour rendering module

EMERGENCY / MOUNTING

/EM / EMS / EMP Emergency options

AURORA.ACC.01 Surface mounting kit

AURORA.ACC.02 Plasterboard mounting kit

AURORA.ACC.03 Remote sensor

PRODUCT VARIATIONS
/T+DALI, /MC and /BTC controls · /R9 colour rendering · /EM, /EMS and /EMP emergency · surface and plasterboard mounting kits.

DOCUMENT
Technical data
REV 1

OPTICAL Low-glare 600 x 600 LED panel format.	OUTPUT 2425 lm to 4200 lm product output range.	CONTROL Touch dimming, DALI and wireless control options.	MOUNTING Recessed as standard; surface and plasterboard kits available.
--	--	--	--