


Beacon Emergency

Independent LED emergency module with a bi-colour circle charge indicator and three-hour emergency duration.

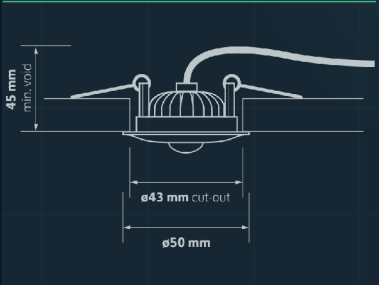

266-268 lm EMERGENCY OUTPUT	3 h EMERGENCY DURATION	IP54 INGRESS PROTECTION	50 mm BEZEL DIAMETER
		BEZEL Ø50 mm	CUT-OUT Ø43 mm
		VOID 45 mm min.	FINISH White / black

01 Output selection

TWO OPTIC DISTRIBUTIONS FOR EMERGENCY ROUTE AND OPEN-AREA COVERAGE.

MODELS	OPTIC	OUTPUT	BEAM ANGLE	COLOUR
ILEM/OA	Open area	268 lm	135°	White
ILEM/CO	Corridor	266 lm	115° x 155°	White

Black finish, DALI/self-test and EM-Pro options are selected as suffixes.

02 Configure Beacon Emergency

OPTIC DISTRIBUTION, FINISH AND EMERGENCY-TEST OPTIONS ARE AVAILABLE FOR SELECTION.

OPTIC DETAILS  /OA Open-area optic  /CO Corridor optic	OPTIC / TESTING /OA / /CO Open-area or corridor optic /EMD DALI + self-test /EMP EM-Pro; void access required	FINISH /BK Black finish WHITE RAL 9016 standard BLACK RAL 9005 option
---	---	---

PRODUCT VARIATIONS

/OA open-area optic - /CO corridor optic - /BK black finish - /EMD DALI + self-test - /EMP EM-Pro.

DOCUMENT

Technical data
REV 4

EMERGENCY MODULE Independent LED emergency module with three-hour emergency duration.	INDICATOR Bi-colour circle charge indicator.	PROTECTION IP54 ingress protection as standard.	OPTICS Open-area or corridor distribution available.
---	--	---	--