


Brilliance

Suspended linear LED luminaire in four standard lengths with output and control options.

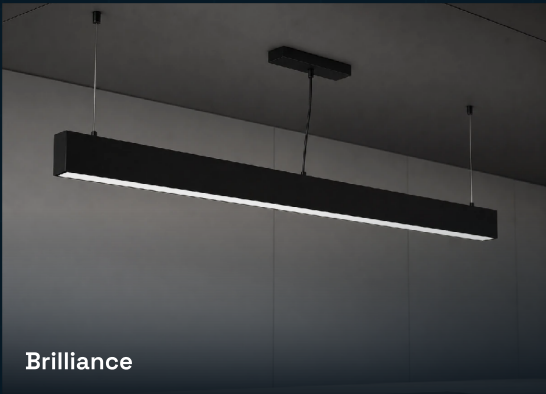


1725-5425 lm
STANDARD OUTPUT

21-60 W
STANDARD POWER

3000 / 4000 K
LED COLOUR

L80 / F10
72,000 HOURS

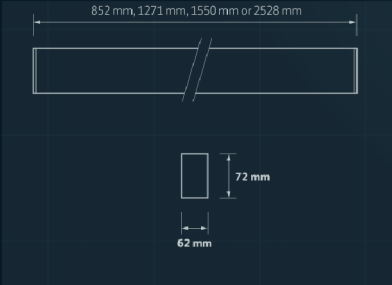

LENGTHS
850 / 1200 / 1500 /
2500 mm

WIDTH
72 mm

BODY HEIGHT
62 mm

MOUNTING
Suspended

01 Output selection

EIGHT STANDARD MODEL REFERENCES ACROSS FOUR BODY LENGTHS.

MODELS	LENGTH	OUTPUT	POWER	LED COLOUR
163.001 / .002	850 mm	1725-1825 lm	21 W	3000 / 4000 K
163.003 / .004	1200 mm	2575-2725 lm	30 W	3000 / 4000 K
163.005 / .006	1500 mm	3150-3325 lm	35 W	3000 / 4000 K
163.007 / .008	2500 mm	5150-5425 lm	60 W	3000 / 4000 K

Output, power and colour-temperature values are source data.

02 Configure Brilliance

FINISH, OUTPUT, CONTROL AND EMERGENCY OPTIONS ARE AVAILABLE FOR SELECTION.

AVAILABLE OPTION DETAILS					FINISH / OUTPUT	CONTROL / EMERGENCY
					/WH / /BK White or black body /LO / /HO Lower or higher output /LG Low-glare prismatic lens	/ECO SwitchDIM, DALI or DSI /EMI Emergency conversion
/WH White body	/BK Black body	/LO Lower output	/ECO Control	/EMI Emergency		

PRODUCT VARIATIONS

/WH white body - /BK black body - /LO lower output - /HO higher output - /LG low glare - /ECO control - /EMI emergency.

DOCUMENT

Technical data
REV 1

LED 3000 K and 4000 K standard colour temperatures.	LIFETIME L80 / F10 rated at 72,000 hours.	FORMATS 850 mm, 1.2 m, 1.5 m and 2.5 m lengths.	MOUNTING Suspended linear luminaire format.
--	--	--	--