

Clarity

Compact professional LED downlight with Tridonic technology, low-glare optics and a broad accessory set.




1025-3275 lm
LISTED LUMINAIRE OUTPUT

8-28 tcW
LISTED POWER RANGE

3000K / 4000K
COLOUR TEMPERATURE

UGR <19
LOW-GLARE PERFORMANCE

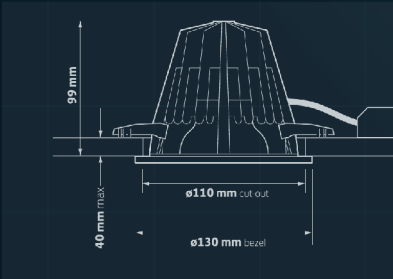

BODY HEIGHT
99 mm

CEILING DEPTH
40 mm max

CUT-OUT
110 mm

BEZEL
130 mm

01 Ordering information

STANDARD 40 DEGREE MULTI-FACETED REFLECTOR. FOUR OUTPUT LEVELS ARE LISTED AT 3000K AND 4000K.

MODEL	OUTPUT	POWER	CCT	REFLECTOR	UGR
CLARITY.001	1025 lm	8 tcW	3000K	40 degree MF	<19
CLARITY.002	1075 lm	8 tcW	4000K	40 degree MF	<19
CLARITY.003	1725 lm	14 tcW	3000K	40 degree MF	<19
CLARITY.004	1800 lm	14 tcW	4000K	40 degree MF	<19
CLARITY.005	2375 lm	19 tcW	3000K	40 degree MF	<19
CLARITY.006	2450 lm	19 tcW	4000K	40 degree MF	<19
CLARITY.007	3150 lm	28 tcW	3000K	40 degree MF	<19
CLARITY.008	3275 lm	28 tcW	4000K	40 degree MF	<19

02 Configure Clarity

TRIDONIC LED MODULE AND DRIVER SYSTEM.

REFLECTOR / EMERGENCY	CONTROLS / DRIVER	EMERGENCY / ACCESSORIES
 MF25 25 degree	 SwitchDIM, DALI or DSI	 Remote indicator
 SP40 40 degree specular	 Casambi Bluetooth wireless network incl. dimming	 DALI and self-test remote indicator
 SA50 50 degree satin	 Mains dimming	 Integral indicator
 MF60 60 degree	 Tridonic Excite driver; 100K hours, I-Select, loop-in / loop-out	 DALI and self-test integral indicator
 EMI Integral indicator		

PRODUCT VARIATIONS

TA200 bezel finishes · TA225/WH clear halo · TA226/WH opal halo · AT200/WH anti-tamper · IP65 and IP64 glass options · TA220/TA210 hi-lights and snoots · plaster-in and halo kits · GF208/GF218 anti-tamper accessories · CLARITY.ACC.01 surface can · CLARITY.ACC.02 suspended surface can · CLARITY.ACC.05 plug and sockets.

COMPLIANCE

UKCA · CE · DC Declaration of Conformity available.

OPTICAL CONTROL	SYSTEM	INTEGRATION	WARRANTY / FINISH
40 degree multi-faceted reflector supplied as standard; alternate 25, 40, 50 and 60 degree options.	Tridonic LED module and driver system with SwitchDIM, DALI, DSI, Casambi and mains-dimming options.	Recessed body under 100 mm with 110 mm cut-out and 130 mm bezel.	5 year warranty, decorative bezel options plus IP64 glass and IP65 clear poly bezel choices.