


Eco

Professional low-glare LED downlight with a multi-faceted reflector, high output range and dedicated control and emergency options.

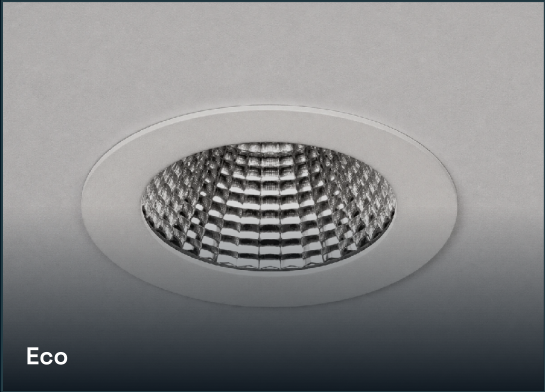


1100-4975 lm
LUMINAIRE OUTPUT

8-40.5 W
LUMINAIRE POWER

>66,000 h
L90 LIFE

IP54 / IP65
PROTECTION OPTIONS

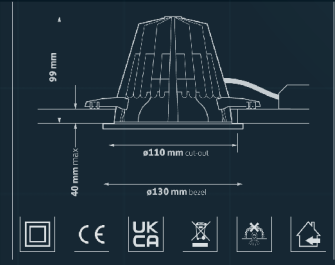

BODY HEIGHT
99 mm

CEILING DEPTH
40 mm max.

CUT-OUT
110 mm diameter

BEZEL
130 mm diameter

01 Output selection

STANDARD OUTPUT ENTRIES ARE LISTED AT 3,000K AND 4,000K FROM THE GOVERNING SOURCE TABLE.

MODELS	OUTPUT	POWER	LED COLOUR
78.001 / .002	1100-1125 lm	8 W	3,000K / 4,000K
78.003 / .004	1900-1950 lm	13.5 W	3,000K / 4,000K
78.005 / .006	2625-2700 lm	19 W	3,000K / 4,000K
78.007 / .008	3525-3625 lm	27 W	3,000K / 4,000K
78.009 / .010	4825-4975 lm	40.5 W	3,000K / 4,000K

02 Configure Eco

REFLECTOR, CONTROL AND EMERGENCY ARRANGEMENTS.

SOURCE OPTION CROPS	REFLECTORS / COLOUR	CONTROL / EMERGENCY
 MF25 25 degree multi-facet	/MF25 25 degree multi-faceted reflector	/T+DALI · /BTC Touch / DALI or Casambi wireless control
 SP40 40 degree specular	/MF60 60 degree multi-faceted reflector	/EM · /EMS · /END Emergency arrangements
 T+DALI Touch / DALI	/SP40 40 degree specular reflector	/EMI · /EMSI · /ENDI Integral / self-test variants
 BTC Casambi wireless	/SA50 · /R9 Additional source-listed options	
 EMD DALI emergency		

PRODUCT VARIATIONS

Multi-faceted, specular and satin reflector arrangements; Ra90 option; touch / DALI and Casambi control; emergency options as source-listed.

COMPLIANCE

UKCA · CE

OPTICAL CONTROL	SYSTEM	INTEGRATION	LIFE / PROTECTION
Low-glare recessed downlight with source-listed reflector choices.	Philips LED and driver system with dedicated controls.	110 mm cut-out, 130 mm bezel and 40 mm maximum recess.	>66,000 h L90; IP54 / IP65 options.