

Edge

Architectural LED wall washer with an asymmetric optic, compact recessed body and configurable control, emergency and finish options.




625-1325 lm
ENGINE OUTPUT

6.5-13.5 W
LUMINAIRE POWER

>55,000 h
L90 / F10 LIFE

IP44
PROTECTIVE LENS

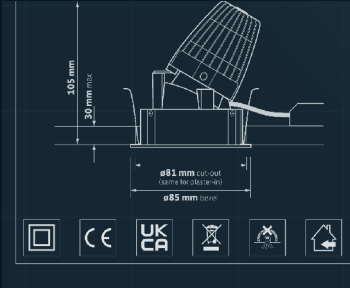

BODY HEIGHT
105 mm

CEILING DEPTH
30 mm max.

CUT-OUT
81 mm diameter

BEZEL
85 mm diameter

01 Output selection

THREE MODEL GROUPS ARE LISTED ACROSS 2,700K, 3,000K AND 4,000K SOURCE VARIANTS.

MODELS	OUTPUT	POWER	LED COLOUR
131.001-.003	625-700 lm	6.5-8 W	2700K / 3000K / 4000K
131.004-.006	850-900 lm	7.5-10 W	2700K / 3000K / 4000K
131.007-.009	1150-1325 lm	11.5-13.5 W	2700K / 3000K / 4000K

02 Configure Edge

OPTIC, CONTROL, EMERGENCY AND FINISH ARRANGEMENTS.

SOURCE OPTION CROPS					OPTIC / CONTROL		EMERGENCY / FINISH	
					/NB Narrow beam option		/EX · /EMD Emergency arrangements	
					/ECO · /MDIM Control and dimming options		/EMI · /EMDI Integral emergency variants	
					/BTC Casambi wireless network		/BK · /WSB Finish options	
					/PI · /TLT Source-listed integration options		/9 Source-listed accessory code	

PRODUCT VARIATIONS

Asymmetric wall-wash optic with narrow-beam, control, dimming, emergency and finish options as source-listed.

COMPLIANCE

UKCA · CE

OPTICAL CONTROL	SYSTEM	INTEGRATION	LIFE / PROTECTION
Architectural wall washer with source-listed asymmetric and narrow-beam options.	Tridonic LED engine with configurable control and emergency arrangements.	81 mm cut-out, 85 mm bezel and 30 mm maximum recess.	>55,000 h L90/F10; IP44 protective lens.