


Elevate

Professional wall-mounted LED uplight with an opal acrylic diffuser for homogeneous illumination, plus sensor, dimming and emergency options.

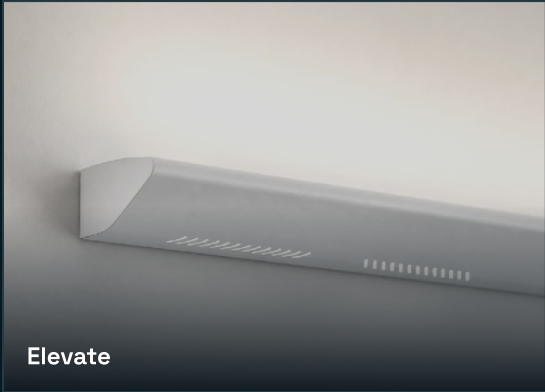

1625-2950 lm
LUMINAIRE OUTPUT

15-29 W
LUMINAIRE POWER

>90,000 h
L70 / F10 LIFE


EA
SENSOR OPTION

LENGTH
639 mm

PROJECTION
194 mm

HEIGHT
70 mm

DIFFUSER
Opal acrylic

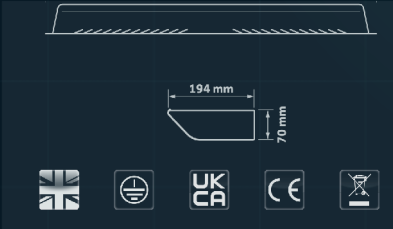

01 Output selection

SIX STANDARD MODEL ENTRIES ARE LISTED AT 3,000K AND 4,000K.

MODEL	OUTPUT	POWER	LED COLOUR
162.001	1625 lm	15 W	3,000K
162.002	1625 lm	15 W	4,000K
162.003	2350 lm	23 W	3,000K
162.004	2350 lm	21 W	4,000K
162.005	2950 lm	29 W	3,000K
162.006	2950 lm	25 W	4,000K

The governing source lists black body, sensor, dimming and emergency arrangements as options.

02 Configure Elevate

BODY, SENSING, CONTROL AND EMERGENCY ARRANGEMENTS.

OPTIONS	CONTROL / SENSOR	EMERGENCY / CONSTRUCTION
 /T+DALI Touch dimming / DALI	/T+DALI Touch dimming or DALI	/EM Integral emergency conversion
 /EA Presence / daylight sensor	/EA Presence and daylight sensor	DIFFUSER Opal acrylic for homogeneous illumination
 /EM Emergency conversion	/BK Black body	APPLICATION Wall-mounted uplight; aids LG7 compliance
 /BK Black body		

PRODUCT VARIATIONS

Opal acrylic diffuser · /BK black body · /EA presence and daylight sensor · /T+DALI touch dimming or DALI · /EM integral emergency conversion.

DOCUMENT

Technical data
REV 1

OPTICAL CONTROL Opal acrylic diffuser provides homogeneous illumination.	SYSTEM Philips LED module and driver.	INTEGRATION 639 mm length, 194 mm projection and 70 mm height.	LIFE / OPTIONS Nominal rated life over 90,000 hours at L70/F10; sensor, DALI and emergency options.
--	---	--	---