


Focal Track

Adjustable LED track spotlight with interchangeable lenses, supplied with a medium beam as standard.

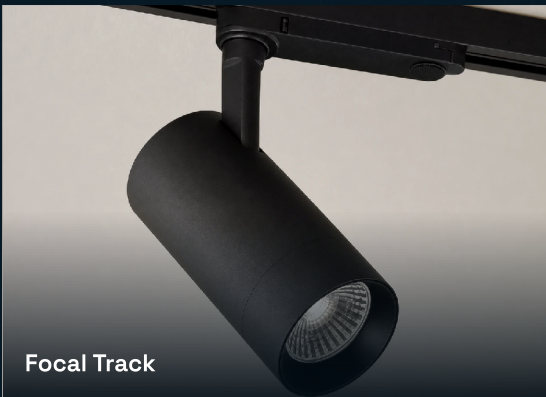

1,500-2,800 lm

ENGINE OUTPUT

11.0-26.5 W


SYSTEM POWER

3000K / 4000K

COLOUR TEMPERATURE

>55,000 h

RATED LIFE L90

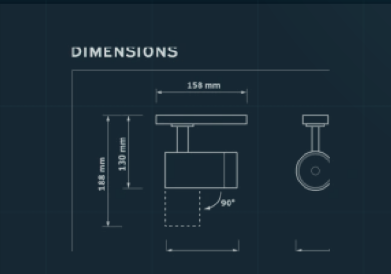

LENGTH

158 mm

OVERALL HEIGHT

188 mm

DIAMETER

64 mm

MOUNTING

Track mounted

01 Output selection

OUTPUT, POWER AND COLOUR-TEMPERATURE COMBINATIONS ARE SELECTED BY MODEL CODE.

MODELS	OUTPUT	POWER	LED COLOUR	MOUNTING
FOCALTRACK.001/LO to .006	1,500-2,800 lm	11.0-26.5 W	3000K / 4000K	Track

Confirm the selected output, CCT and driver combination in the complete product data.

02 Configure Focal Track

INTERCHANGEABLE OPTICS, CONTROL AND ACCESSORY CHOICES ARE AVAILABLE FOR SELECTION.

AVAILABLE OPTION DETAILS					OPTICS		CONTROL / ACCESSORIES	
					MEDIUM BEAM	Supplied as standard	/MDIM / /DALI / /BTC	Mains dimming, DALI and Casambi
/WB	/SNB	/NB	/DALI	/BTC	/SNB / /NB / /WB	Interchangeable lens options	/R9	Ra90 module
Wide beam lens	Super-narrow lens	Narrow beam lens	DALI control	Casambi control	/HC	Honeycomb louvre accessory	ACCESSORIES	Long snoots, asymmetric snoots and barn doors

PRODUCT VARIATIONS

Medium beam standard - /SNB / /NB / /WB lens options - /MDIM / /DALI / /BTC controls - /HC honeycomb louvre - Ra90 module and accessory options.

DOCUMENT

Technical data
REV 1

OPTICAL	DRIVER	CONTROLS	ACCESSORIES
Interchangeable lenses; medium beam supplied standard.	Vossloh LED and in-track driver system.	Mains dimming, DALI and Casambi options.	Honeycomb louvre, snoots and barn doors listed.