

Halo

A recessed downlight with a reduced-profile white bezel, Philips LED and driver system, and reflector, control and emergency options.




1075-4800 lm
LUMINAIRE OUTPUT

9.5-46.5 W
LUMINAIRE POWER

60,000 h
L70 / B10 LIFE

IP54 / IP65
PROTECTION

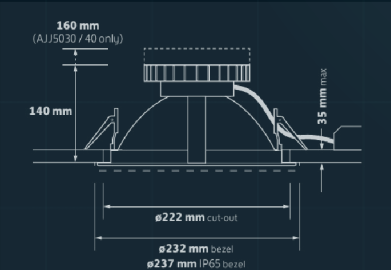

CUT-OUT
222 mm diameter

STANDARD BEZEL
232 mm diameter

IP65 BEZEL
237 mm diameter

HEIGHT
140 mm

01 Output selection

MODELS	OUTPUT RANGE	POWER	LED COLOUR	FORMAT
100.1100.30 / .40	1075-1175 lm	9.5 W	830 / 840	Low output
100.2000.30 / .40	1850-2000 lm	17.5 W	830 / 840	Standard
100.3000.30 / .40	2850-3075 lm	30.5 W	830 / 840	High output
100.5000.30 / .40	4425-4800 lm	46.5 W	830 / 840	Maximum output

For individual ordering and compatibility, refer to the complete product data.

02 Configure Halo

REFLECTOR, CONTROL AND EMERGENCY OPTIONS AVAILABLE FOR SELECTION.

AVAILABLE OPTION DETAILS					CONTROL / EMERGENCY		OPTICAL / INGRESS	
					/T+DALI	SwitchDIM, DALI or DSI	/MF40	40-degree multi-facet reflector
/MF40 40-degree multi-facet					/BTC	Casambi Bluetooth	/65	IP65 bezel
/T+DALI Touch Dimming / DALI / DSI					/EM / EMD	Remote emergency	/EMI / EMDI	Integral emergency indicator
/BTC Casambi Bluetooth								
/EMD Remote emergency								
/65 IP65 bezel								

PRODUCT VARIATIONS

/MF40 multi-facet reflector · /T+DALI · /BTC · remote and integral emergency · /65 IP65 bezel.

DOCUMENT

Technical data
REV 9

OPTICAL 40-degree multi-facet reflector option for controlled beam distribution.	CONSTRUCTION Reduced-profile white bezel with recessed spring mounting.	PROTECTION IP54 standard; IP65 bezel option available.	FORMATS 1075-4800 lm across four output families.
--	---	--	---