


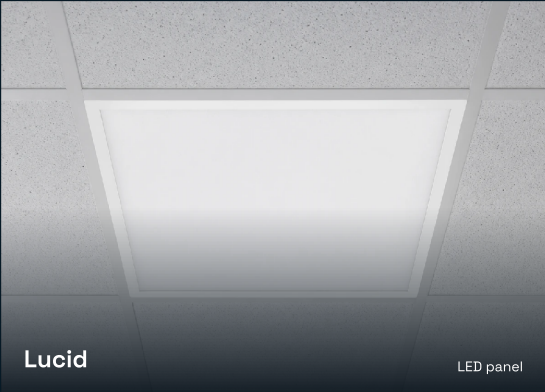

2700–3900 lm
STANDARD OUTPUT

26.0–36.5 W
STANDARD POWER

UGR<19
LOW GLARE

5 year
WARRANTY



WIDTH
595 mm

HEIGHT
595 mm

DEPTH
8.5 mm

GLARE
UGR<19

01 Output selection

FOUR STANDARD MODEL REFERENCES ACROSS TWO LED COLOUR TEMPERATURES.

MODEL	FORMAT	OUTPUT	POWER	LED COLOUR
178.001	595 × 595 mm	2700 lm	26.5 W	3000 K
178.002	595 × 595 mm	3100 lm	26.0 W	4000 K
178.003	595 × 595 mm	3600 lm	36.5 W	3000 K
178.004	595 × 595 mm	3900 lm	34.5 W	4000 K

Select model reference, LED colour and applicable option suffixes.

02 Configuration

OPTION CODES FORM PART OF THE FINAL PRODUCT REFERENCE.

OPTION REFERENCE	SPECIFICATION OPTIONS	MOUNTING ACCESSORIES
 /TPA Option	/TPA Specification option	SURF.178 Surface accessory
 /ECO Option	/ECO Specification option	SUS.178/1.2M Suspension accessory
 /TOP Option	/TOP Specification option	PBF.178 Accessory
 /EM Option	/EM Specification option	
 /EMD Option	/EMD Specification option	
	/BTC Specification option	

AVAILABLE CODE SUFFIXES
/TPA · /ECO · /TOP · /EM · /EMD · /BTC · SURF.178 · SUS.178/1.2M · PBF.178

SELECTION NOTE
Confirm the required model reference, LED colour and accessory selection when specifying.

OUTPUT 2700–3900 lm	FORMAT 595 × 595 × 8.5 mm	GLARE UGR<19	WARRANTY 5 year
------------------------	------------------------------	-----------------	--------------------