

Lumen

A 150 mm surface mounted LED downlight with a 40° multi-faceted reflector as standard.




1025-2400 lm
LUMINAIRE OUTPUT

8-19 W
POWER

UGR<19
LOW GLARE VARIANTS

5 years
WARRANTY

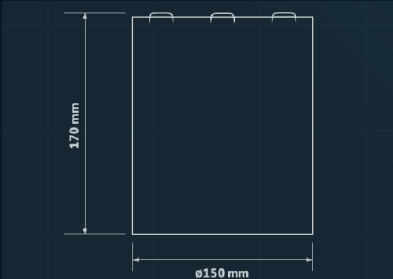

DIAMETER
150 mm

HEIGHT
170 mm

MOUNTING
Surface mounted

STANDARD OPTIC
40°

01 Output selection

SIX MODELS ACROSS THREE OUTPUTS AND TWO COLOUR TEMPERATURES.

MODEL	OUTPUT	POWER	COLOUR TEMPERATURE
181.001	1025 lm	8 W	3000K
181.002	1050 lm	8 W	4000K
181.003	1725 lm	14 W	3000K
181.004	1775 lm	14 W	4000K
181.005	2325 lm	19 W	3000K
181.006	2400 lm	19 W	4000K

02 Configure Lumen

FINISH, REFLECTOR, CONTROL AND EMERGENCY OPTIONS AVAILABLE FOR SELECTION.

AVAILABLE OPTION DETAILS					REFLECTOR / CONTROL		FINISH / MOUNTING	
					/MF60	60° multi-faceted reflector	/GY	Grey can
/WH White	/BK Black can	/MF25 25° reflector	/ECO Control	/EMI Emergency	/SP40	40° specular reflector	/SUS	2 m suspension kit
					/SA50	50° satin reflector	/SUS.B	Suspension, 3 wires

PRODUCT VARIATIONS

/BK Black can · /GY Grey can · /WH White · /MF25 · /MF60 · /SP40 · /SA50 · /TOP · /ECO · /SUS · /SUS.B · /EMI.

DOCUMENT

Technical data
Lumen

OPTICAL 40° multi-faceted reflector as standard.	DRIVER Fixed-current Tridonic driver standard.	CONTROLS /ECO SwitchDIM, DALI or DSI.	EMERGENCY /EMI integral emergency ILEM.
--	--	---	---