


Luminate

Direct / indirect 600 x 600 LED modular for commercial interiors, with a back-lit micro-prismatic central diffuser and softly illuminated lateral wings.

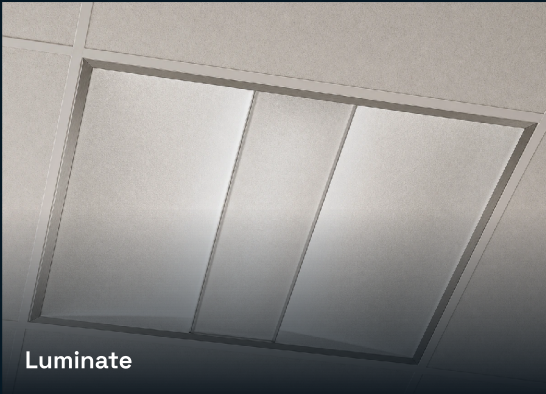

2,975–5,125 lm

LISTED OUTPUT

31.5–46 W

LISTED POWER

Up to 114.0 lm/tcW

LUMINAIRE EFFICACY

>100,000 h L70/B10

RATED LIFE

WIDTH

589 mm

LENGTH

593 mm

HEIGHT

100 mm

OPTICS

Micro-prismatic

01 Output selection

SIX SOURCE-LISTED OUTPUT AND POWER PAIRINGS.

LED COLOUR	OUTPUT	POWER	LUMINAIRE EFFICACY
3000 K	2,975 lm	32.0 W	92.7 lm/tcW
4000 K	3,200 lm	32.0 W	99.1 lm/tcW
3000 K	3,400 lm	31.5 W	108.3 lm/tcW
4000 K	3,575 lm	31.5 W	114.0 lm/tcW
3000 K	4,875 lm	46.0 W	105.1 lm/tcW
4000 K	5,125 lm	46.0 W	110.1 lm/tcW

Output and power values are source data.

02 Configure Luminate

CONTROL, EMERGENCY AND MOUNTING CHOICES ARE SOURCE-LISTED.

AVAILABLE OPTION DETAILS

/T+DALI
Control

/BTC
Control

/EMI
Emergency

/EMDI
Emergency

CONTROL

/T+DALI

Touch dimming or DALI gear

/BTC

Casambi wireless network

EMERGENCY / MOUNTING

/EMI / /EMDI /
/ENSI

Three-hour emergency choices

ACC.01 / .02 /
.03

Surface, plasterboard and suspension
accessories

SPECIFICATION OPTIONS
Controls, emergency and mounting accessories.

DOCUMENT
Technical data
MAY 2026

OPTICS

Back-lit micro-prismatic central diffuser.

CONFIGURATION

Surface, plasterboard or suspension mounting accessories.

PERFORMANCE

Up to 114.0 lm/tcW luminaire efficacy.

APPLICATION

Direct / indirect modular for commercial interiors.