


Nova

Compact IP54 recessed LED downlight for general interior lighting.

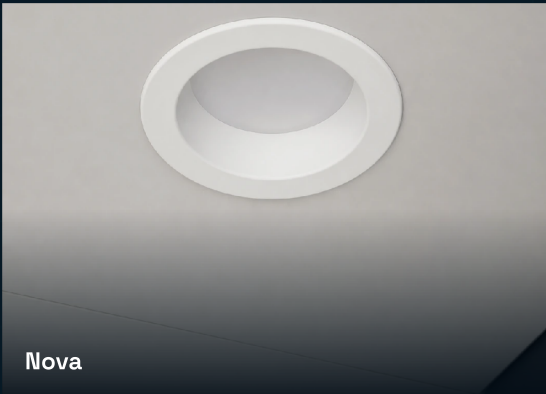


750–850 lm
STANDARD OUTPUT

9 W
SYSTEM POWER

3000 / 4000 / 5500 K
LED COLOUR

IP54
INGRESS PROTECTION



BEZEL
110 mm

CUT-OUT
90 mm

DEPTH
46 mm

CEILING THICKNESS
30 mm max

01 Output selection

ONE MODEL REFERENCE WITH THREE SPECIFIED COLOUR OUTPUTS.

MODEL	OUTPUT	POWER	LED COLOUR	EFFICIENCY
NOVA.001	750 lm	9 W	3000 K	82 lm/tcW
NOVA.001	850 lm	9 W	4000 K	92 lm/tcW
NOVA.001	775 lm	9 W	5500 K	86 lm/tcW

Output, power, colour and efficiency values are source data.

02 Configure Nova

CONTROL AND EMERGENCY SUFFIXES ARE AVAILABLE FOR SELECTION.

AVAILABLE OPTION DETAILS



/ECO
Control



/BTC
Casambi



/EM
Emergency



/EMD
Emergency

CONTROL

/MDIM Phase-cut mains dimming

/ECO / /BTC DALI / DSI or Casambi

EMERGENCY

/EM Emergency remote indicator

/EMD DALI self-test emergency

PRODUCT VARIATIONS

/MDIM phase-cut mains dimming · /ECO SwitchDIM, DALI & DSI · /BTC Casambi · /EM emergency · /EMD DALI self-test emergency.

DOCUMENT

Technical data
REV 1

BODY Compact recessed downlight.	LED 3000 K, 4000 K and 5500 K options.	PROTECTION IP54 rated construction.	CONTROL Control and emergency suffixes available.
--	--	---	---