

Optix

A professional, minimal IP54 LED downlight with a low-glare 36° faceted reflector.




750-775 lm
LUMINAIRE OUTPUT

8 W
POWER

IP54
RECESSED PROTECTION

5 years
WARRANTY

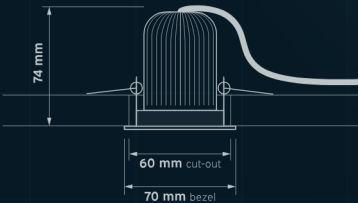

HEIGHT
74 mm

CUT-OUT
60 mm

BEZEL
ø70 mm

OPTIC
36° faceted

01 Output selection

TWO OUTPUTS ACROSS 3000 K AND 4000 K COLOUR TEMPERATURES.

MODEL	OUTPUT	POWER	COLOUR TEMPERATURE
30.001	750 lm	8 W	3000K
30.002	775 lm	8 W	4000K

02 Configure Optix

FINISH, CONTROL, DIMMING AND EMERGENCY OPTIONS AVAILABLE FOR SELECTION.

AVAILABLE OPTION DETAILS					CONTROL / EMERGENCY		FINISH / DIMMING	
 /EM Emergency	 /EMD Self-test DALI	 /ECO SwitchDIM / DALI / DSI	 /BTC Casambi	 /BL Black body	/ECO SwitchDIM, DALI or DSI /BTC Casambi wireless network /EM 3 hour emergency conversion /EMD 3 hour self-test and DALI emergency conversion		/BL Black body /MDIM Phase-cut mains dimming	
 /MDIM Phase-cut								

PRODUCT VARIATIONS

/EM Emergency - /EMD Self-test DALI emergency - /ECO Control - /BTC Casambi - /BL Black body - /MDIM Phase-cut.

DOCUMENT

Technical data
Optix

OPTICAL Injection moulded 36° faceted reflector.	PROTECTION IP54 recessed LED downlight.	CONTROLS SwitchDIM, DALI, DSI or Casambi.	WARRANTY Life >50,000 hours L70/F50.
--	---	---	--