


Solaris

Decorative LED surface luminaire with a low-spotting opal diffuser and black/gold finish palette, suitable for wall or ceiling mounting.

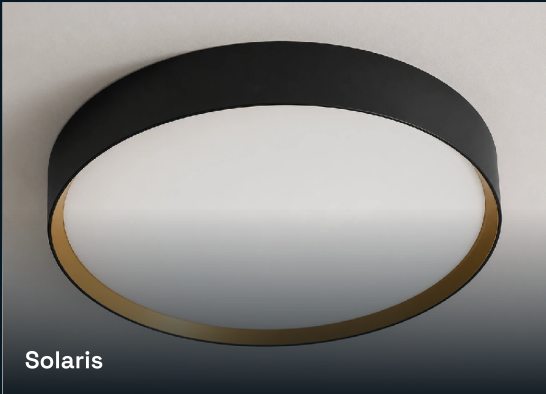

2,130–2,450
lm

LISTED OUTPUT RANGE

23 tcW

LISTED SYSTEM POWER

422 mm

BODY DIAMETER

50,000 h
L70/B50

LONG-LIFE RATING

58 mm

ø422 mm

CE

UK
CA

DIAMETER

422 mm

DEPTH

58 mm

MOUNTING

Wall / ceiling

SUSPENSION

1.5 m kit

01 Output selection

THREE SOURCE-LISTED COLOUR TEMPERATURES AT A CONSTANT 23 TCW.

MODEL / OUTPUT	COLOUR	POWER	FORMAT
SOLARIS.001 – 2,130 lm	3000 K	23 tcW	Surface body
SOLARIS.002 – 2,350 lm	4000 K	23 tcW	Surface body
SOLARIS.003 – 2,450 lm	5500 K	23 tcW	Surface body

Output values are source data.

02 Specify Solaris

SUSPENSION KIT AND CORE LUMINAIRE CONSTRUCTION ARE SOURCE-LISTED.

ACCESSORY REFERENCE

/SUS

Suspension kit

SUSPENSION

/SUS

1.5 m suspension kit c/w ceiling rose

BODY

Surface mounting format

CONSTRUCTION

OPAL

High-transmission, low-spotting diffuser

BLACK / GOLD

RAL 9005 body with gold interior trim

SPECIFICATION OPTIONS

Suspension kit, mounting configuration and listed colour temperatures.

DOCUMENT

Technical data
REV 1 / MAY 2026

DIFFUSER

High-transmission, low-spotting opal diffuser.

FORMAT

Decorative surface luminaire for wall or ceiling mounting.

FINISH

Black RAL 9005 with gold interior trim.

WARRANTY

Five-year source-listed warranty.