


# Stream

Direct/indirect linear LED luminaire for solo runs, patterns and continuous lines of light.

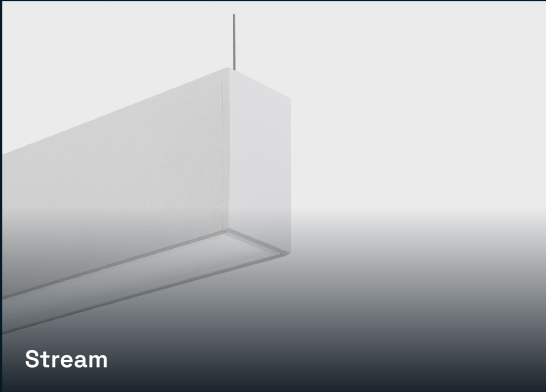

2,300–4,650  
lm

LISTED OUTPUT RANGE

75:25

DIRECT / INDIRECT RATIO

3 lengths

STANDARD RANGE

TPa

OPAL LENS



LENGTHS

852 / 1271 / 1550  
mm

HEIGHT

109 mm

WIDTH

62 mm

STANDARD FINISH

RAL 9006 grey

## 01 Output selection

SIX SOURCE-LISTED MODEL REFERENCES ACROSS 3000 K AND 4000 K.

| MODEL REF. | LENGTH | COLOUR | STANDARD | /L0      | /H0      |
|------------|--------|--------|----------|----------|----------|
| STREAM.001 | 850 mm | 3000 K | 2,300 lm | 1,550 lm | 3,650 lm |
| STREAM.002 | 850 mm | 4000 K | 2,400 lm | 1,625 lm | 3,825 lm |
| STREAM.003 | 1.2 m  | 3000 K | 3,450 lm | 2,325 lm | 5,475 lm |
| STREAM.004 | 1.2 m  | 4000 K | 3,600 lm | 2,450 lm | 5,725 lm |
| STREAM.005 | 1.5 m  | 3000 K | 4,450 lm | 3,000 lm | 7,050 lm |
| STREAM.006 | 1.5 m  | 4000 K | 4,650 lm | 3,150 lm | 7,375 lm |

Output values are source data. Standard model reference corresponds to the listed standard output.

## 02 Specify Stream

FINISH, OUTPUT, CONTROL, EMERGENCY AND OPTIC CHOICES ARE SOURCE-LISTED.

| FINISH         | OUTPUT & OPTIC                   | CONTROL & EMERGENCY                      |
|----------------|----------------------------------|------------------------------------------|
| /WH White body | /L0 / /H0 Lower or higher output | /ECO SwitchDIM, DALI or DSI              |
| /BK Black body | /LG Low glare prismatic lens     | /ENI EM conversion; excludes .001 / .002 |

### SPECIFICATION OPTIONS

Butt-joint brackets, custom body colours and a diffuser removal tool are also source-listed.

### DOCUMENT

Technical data  
REV 1 / MAY 2026

|                                            |                                                       |                                                  |                                          |
|--------------------------------------------|-------------------------------------------------------|--------------------------------------------------|------------------------------------------|
| <b>OPTIC</b><br>TPa opal lens as standard. | <b>LOW GLARE</b><br>Prismatic lens available for LG7. | <b>ENGINE</b><br>Tridonic LED and driver system. | <b>ORIGIN</b><br>Manufactured in the UK. |
|--------------------------------------------|-------------------------------------------------------|--------------------------------------------------|------------------------------------------|