


Suspend Pro

Professional surface-mounted LED downlight with integral Philips LED and driver system, built around a low-glare multi-faceted reflector.

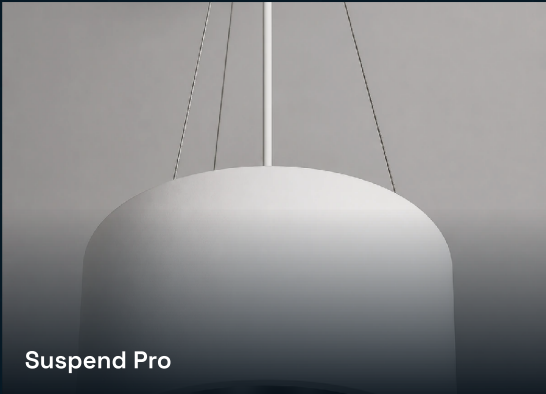

1,200–3,125 lm

LISTED OUTPUT RANGE

203 mm

DIAMETER

133 lm/tcW

MAXIMUM EFFICACY

>60,000 h

L80/B10

RATED LIFE

DIMENSIONS

DIAMETER

203 mm

HEIGHT

165 mm

MOUNTING

Surface-mounted

REFLECTOR

Multi-faceted

01 Output selection

SIX SOURCE-LISTED OUTPUT OPTIONS IN 3000 K AND 4000 K.

MODEL / COLOUR	OUTPUT	POWER	PRODUCT EFFICACY
15.001 / 3000 K	1,200 lm	9.5 tcW	126 lm/tcW
15.002 / 4000 K	1,250 lm	9.5 tcW	132 lm/tcW
15.003 / 3000 K	1,900 lm	15.0 tcW	127 lm/tcW
15.004 / 4000 K	2,000 lm	15.0 tcW	133 lm/tcW
15.005 / 3000 K	2,950 lm	24.0 tcW	123 lm/tcW
15.006 / 4000 K	3,125 lm	24.0 tcW	130 lm/tcW

Output, power and efficacy values are source data.

02 Specify Suspend Pro

FINISH, REFLECTOR, CONTROL, EMERGENCY AND SUSPENSION CHOICES ARE SOURCE-LISTED.

FINISH / REFLECTOR

/BK / /GY / /WH

Finish options

/SA65

Satin etched reflector

/R9

Premium White LED

CONTROLS

/T+DALI

Touch dimming or DALI

/BTC

Casambi wireless network

EMERGENCY / SUSPENSION

/EMI / /EMDI

Integral ILEM options

/SUS / /SUS.B

2 m suspension kits

SPECIFICATION OPTIONS

Finish, reflector, control, emergency and suspension choices.

DOCUMENT

Technical data
REV 1 / MAY 2026

OPTICS

Low-glare multi-faceted reflector as standard.

COLOUR

MacAdam colour tolerance 3 SDCM.

SYSTEM

Integral Philips LED and driver system.

MANUFACTURE

Proudly made in the UK.