


Synergy

Adjustable twin LED surface-mounted framelight for precise commercial accent lighting.

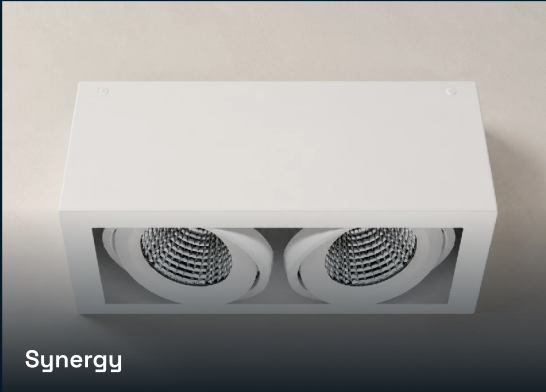

2050–6000 lm
LISTED OUTPUT

18–61 W
SYSTEM POWER

3000 / 4000 K
LED COLOUR

>60,000 h
STATED LIFE



LENGTH
383 mm

WIDTH
225 mm

HEIGHT
154 mm

MOUNTING
Surface mounted

01 Output selection

SIX MODEL REFERENCES ACROSS THREE OUTPUT STEPS.

MODELS	OUTPUT	POWER	LED COLOUR	OPTIC
SYNERGY.001 / .002	2050 lm	20 / 18 W	3000 / 4000 K	Medium beam
SYNERGY.003 / .004	4000 lm	38 / 36 W	3000 / 4000 K	Medium beam
SYNERGY.005 / .006	6000 lm	61 / 59 W	3000 / 4000 K	Medium beam

Output, power and colour values are source data.

02 Configure Synergy

BEAM, CONTROL, COLOUR-RENDERING AND FINISH CHOICES ARE SOURCE-LISTED.

AVAILABLE OPTION DETAILS				BEAM / CONTROL	COLOUR / FINISH
				/NB / /WB Narrow / wide beam reflectors	/R9 Ra 90 high colour rendering
/NB Beam	/WB Beam	/ECO Control	/BK Finish	/ECO SwitchDIM, DALI or DSI	/BK Black body and gimbal

PRODUCT VARIATIONS

Single version; recessed version and other colours available on request.

DOCUMENT

Technical data
REV 1

REFLECTOR	SYSTEM	ADJUSTMENT	APPLICATION
Medium beam multi-faceted reflector standard.	Tridonic LED and driver system.	Two gimbal fixing positions.	Retail, hospitality and commercial interiors.