

Totem Pendant

Decorative tubular pendant spotlight with dimming, Bluetooth and track-mount variants.




625–1,325 lm
LISTED OUTPUT RANGE

6.5–13.5 W
LISTED POWER RANGE

55,000 h
L90/F10 RATING

2 m
SUSPENSION LENGTH

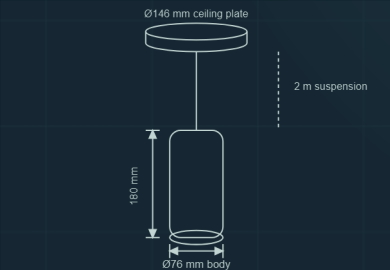

BODY LENGTH
180 mm

BODY DIAMETER
76 mm

CEILING PLATE
146 mm diameter

SUSPENSION
2 m

01 Output selection

NINE SOURCE-LISTED MODEL REFERENCES ACROSS 2700 K, 3000 K AND 4000 K.

MODEL REF.	OUTPUT	COLOUR	POWER	LED SYSTEM
.001 / .002 / .003	625 / 650 / 700 lm	2700 / 3000 / 4000 K	8.0 / 6.5 / 6.5 W	Tridonic
.004 / .005 / .006	850 / 850 / 900 lm	2700 / 3000 / 4000 K	10.0 / 7.5 / 7.5 W	
.007 / .008 / .009	1,150 / 1,250 / 1,325 lm	2700 / 3000 / 4000 K	13.5 / 11.5 / 11.5 W	

Output and power values are source data.

02 Specify Totem

OPTIC, CONTROL AND TRACK-MOUNTING CHOICES ARE SOURCE-LISTED.

OPTICS & COLOUR	PENDANT CONTROL	TRACK VARIANTS
/WSB White softlight baffle /9 Ra90 colour rendering /NB Narrow beam reflector	/MDIM Pendant mains dimming /ECO Pendant DALI / SwitchDIM / DSI /BTC Pendant Bluetooth Casambi	/TK Track mounted fixed output /TKDALI Track mounted DALI /TKBTC Track mounted Bluetooth Casambi

SPECIFICATION OPTIONS

Optic, control and track mounting choices for Totem project schedules.

DOCUMENT

Technical data
REV 1 / JUNE 2026

PLATFORM	FINISH	MOUNTING	DECLARATION
Tridonic LED engine and driver system.	Semi-gloss black as standard.	Pendant and track variants.	UKCA and CE declaration available.