


Trio

Low-profile IP54 commercial downlight with a recessed opal diffuser and discreet 190 mm bezel.

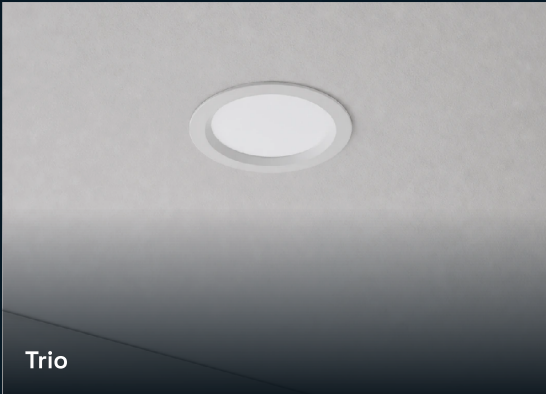

1,125–2,275 lm
LISTED OUTPUT

11–21 tcW
LISTED POWER

3000 / 4000 / 5500 K
LED COLOUR

IP54
INGRESS PROTECTION

BEZEL
190 mm

CUT-OUT
160 mm

DEPTH
46 mm max.

RATED LIFE
50,000 h L70



01 Output selection

SIX SOURCE-LISTED SELECTIONS ACROSS THREE LED COLOURS.

OUTPUT	POWER	LED COLOUR	LIGHT-SOURCE EFFICACY	SELECTION
1,125 lm	11 tcW	3000 K	146 lm/W	Source-listed
1,200 lm	11 tcW	4000 K	155 lm/W	Source-listed
1,200 lm	11 tcW	5500 K	155 lm/W	Source-listed
2,050 lm	21 tcW	3000 K	146 lm/W	Source-listed
2,275 lm	21 tcW	4000 K	155 lm/W	Source-listed
2,200 lm	21 tcW	5500 K	155 lm/W	Source-listed

Output, power and efficacy values are source data.

02 Configure Trio

CONTROL, EMERGENCY AND CONNECTOR CHOICES ARE SOURCE-LISTED.

AVAILABLE OPTION DETAILS					CONTROL GEAR		EMERGENCY / VARIATION	
 /MDIM Control	 /ECO Control	 /BTC Control	 /EM Emergency	 /EMD Emergency	/MDIMPhase-cut mains dimming /ECO SwitchDIM / DALI / DSI /BTCCasambi wireless network including dimming	/EMEmergency remote indicator	/EMD DALI self-test emergency remote indicator	
 PV Variation								

PRODUCT VARIATIONS

Control, emergency and connector choices.

DOCUMENT

Technical data
REV 1

DIFFUSER

Recessed opal PC diffuser for a soft visible aperture.

SYSTEM

SMD LED platform powered by Tridonic.

FINISH

Bezel finished in RAL 9016 white.

APPLICATION

Professional commercial downlight applications.