

Twist

Mini high-output, low-glare adjustable LED gimbal with Philips LED and driver system.



975–2,650 llm

LISTED OUTPUT RANGE

355°

ROTATION

30°

TILT ADJUSTMENT

>50,000 h


L70/B10 MAINTENANCE

BEZEL
150 mm

CUT-OUT
140 mm

HEIGHT
115 mm max

MINIMUM VOID
35 mm

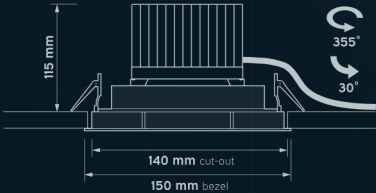

01 Output selection

SIX SOURCE-LISTED MODEL REFERENCES ACROSS 3000 K AND 4000 K.

MODEL REF.	OUTPUT	COLOUR	POWER	OPTIC
TWIST.001	975 llm	3000 K	10 tcW	24° standard
TWIST.002	1,050 llm	4000 K	10 tcW	24° standard
TWIST.003	1,650 llm	3000 K	16,5 tcW	24° standard
TWIST.004	1,775 llm	4000 K	16,5 tcW	24° standard
TWIST.005	2,450 llm	3000 K	27 tcW	24° standard
TWIST.006	2,650 llm	4000 K	27 tcW	24° standard

Output and power values are source data; 24° reflector is standard.

02 Specify Twist

REFLECTOR, FINISH, DIMMING, CASAMBI AND EMERGENCY OPTIONS ARE SOURCE-LISTED.

REFLECTOR & FINISH	CONTROL	EMERGENCY
/NB / /WB 12° or 40° reflector	/T+DALI Touch dimming / DALI	/EM 3 h conversion with remote indicator
CONTACT SALES Black body	/BTC Casambi wireless network	/END 3 h DALI / ST conversion

SPECIFICATION OPTIONS

Reflector, finish, dimming, Casambi and emergency options.

DOCUMENT

Technical data
REV 1 / MAY 2026

MODULE	DRIVER	FLICKER	WARRANTY
Premium white Ra90 LED module.	Philips LED and driver system.	No visible flicker (IEEE 1789-2015).	5-year warranty.