


Circa

Low-glare architectural LED downlight with circular-design credentials, broad output choice and emergency options.

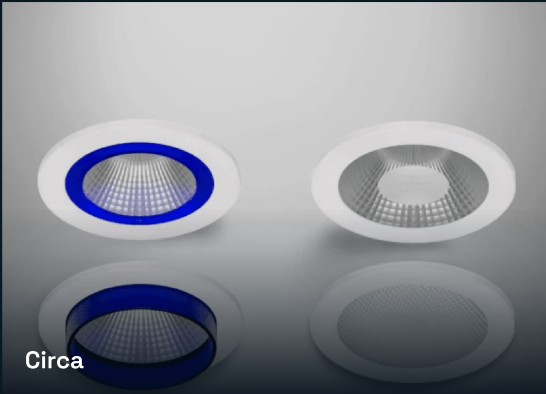

1,200–4,600 lm
LISTED OUTPUT RANGE

>50,000 h
L90 MAINTENANCE

<19
LOW UGR OPTION

TM66
EXCELLENT CIRCULARITY

CUT-OUT
Ø176 mm

BEZEL DIAMETERS
Ø192 / 195 / 198 mm

BODY HEIGHT
103 mm

DRAWING REFERENCE
CIRCA.001–.008

01 Output selection

EIGHT SOURCE-LISTED MODEL REFERENCES ACROSS 3000 K AND 4000 K.

MODEL REF.	OUTPUT	COLOUR	POWER	LIFE
CIRCA.001 / .002	1,200 / 1,250 lm	3000 / 4000 K	9.5 W	>50,000 h L90
CIRCA.003 / .004	1,925 / 2,025 lm	3000 / 4000 K	15.0 W	
CIRCA.005 / .006	3,025 / 3,200 lm	3000 / 4000 K	24.5 W	
CIRCA.007 / .008	4,350 / 4,600 lm	3000 / 4000 K	38.0 W	

Paired rows: 3000 K / 4000 K respectively. Output, power and maintenance values are source data.

02 Specify Circa

REFLECTOR, CONTROL AND EMERGENCY CHOICES ARE SOURCE-LISTED.

REFLECTOR & OPTICAL

/SA6565 degree satin etched reflector

/R9High colour rendering LED module

/54IP64 sealed clear lens

CONTROL GEAR

/T+DALITouch dimming or DALI

/BTCCasambi with dimming

STANDARDPhilips SLM LED module and driver

EMERGENCY PATHS

/EMEmergency remote indicator

/END / /EMMDALI or wireless mesh remote

/EMI / /EMDI / /EMMIIntegral emergency paths

SPECIFICATION OPTIONS

Control, optical, bezel and emergency choices for Circa. Twist-lock and IP65 bezels are source-listed.

DOCUMENT

Technical data
REV 1 / MAY 2026

PLATFORM
Philips SLM LED module and driver system.

OPTICS
55 degree aluminium reflector.

PERFORMANCE
Up to 135 luminaire lumens per total circuit watt.

WARRANTY
5 year warranty statement.