

Vivid

Miniature low-glare LED pinhole downlight with fixed and tilt bezel options for discreet architectural ceiling details.



550–775 lm

SOURCE-LISTED OUTPUT RANGE

UGR <16


LOW GLARE

76 mm

BEZEL DIAMETER

>55,000 h

L80/B10

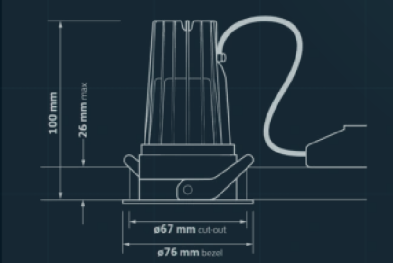

BEZEL

76 mm

CUT-OUT

67 mm

BODY HEIGHT

100 mm

BELOW CEILING

26 mm max

01 Output selection

SIX SOURCE-LISTED LED ENGINE AND COLOUR-TEMPERATURE COMBINATIONS.

MODEL / OUTPUT	COLOUR	POWER	SYSTEM EFFICACY
VIVID.001 – 550 lm	2700 K	7.5 tcW	69 lm/tcW
VIVID.002 – 575 lm	3000 K	6.0 tcW	87 lm/tcW
VIVID.003 – 600 lm	4000 K	6.0 tcW	92 lm/tcW
VIVID.004 – 725 lm	2700 K	9.5 tcW	74 lm/tcW
VIVID.005 – 750 lm	3000 K	7.5 tcW	95 lm/tcW
VIVID.006 – 775 lm	4000 K	7.5 tcW	98 lm/tcW

Output and efficacy values are source data.

02 Specify Vivid

SOURCE-LISTED CONTROL, EMERGENCY, BODY AND OPTICAL SUFFIX CHOICES.

CONTROL / EMERGENCY	BODY / BAFFLE	OPTICAL / ACCESSORY
/MDIM / ECO / BTC Mains dimming, DALI/DSI or wireless	/T / BL / BLT Tilt and black body choices	/NB / 9 24 degree lens or high colour rendering
/EM / EMD / EMM Remote-indicator emergency variants	/WSB / GB White softlight or gold baffle	/HC / 54 Honeycomb louvre or IP54 ribbed glass

SPECIFICATION OPTIONS

Control, emergency, body, baffle, beam, colour-rendering and accessory choices.

DOCUMENT

Technical data
REV 1 / MAY 2026

OPTICS Low-glare matt black baffle with 40 degree reflector.	ENGINE Tridonic SLE Advanced LED light engine.	FINISH Die-cast bezel in white RAL 9016.	WARRANTY Five-year source-listed warranty.
--	--	--	--