


Zenith

Decorative LED wall light with soft upward and downward illumination.

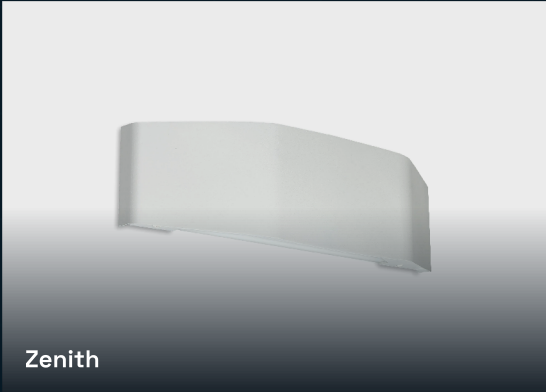

800–2,250 lm
LISTED OUTPUT RANGE

9–24 tcW
LUMINAIRE POWER

>72,000 h
L80/B10 MAINTENANCE

400 mm
PRODUCT LENGTH



LENGTH
400 mm

DEPTH
110 mm

BODY HEIGHT
81 mm

DRAWING REFERENCE
ZENITH.001–.006

01 Model selection

MODEL REF.	OUTPUT	COLOUR	POWER	EFFICACY
ZENITH.001	800 lm	3000 K	9 tcW	89 lm/tcW
ZENITH.002	825 lm	4000 K	9 tcW	92 lm/tcW
ZENITH.003 / .004	1,500 / 1,550 lm	3000 / 4000 K	16 tcW	94 / 97 lm/tcW
ZENITH.005 / .006	2,150 / 2,250 lm	3000 / 4000 K	24 tcW	90 / 94 lm/tcW

Paired rows list 3000 K / 4000 K respectively. Output, power and efficacy are source data.

02 Specify Zenith

FINISH OPTIONS	CONTROL GEAR	EMERGENCY PATHS
/BK Black — RAL 9005	/ECO SwitchDIM / DALI / DSI	/EMI Emergency integral indicator
/GY Grey — RAL 9006	/BTC Casambi wireless dimming	/ENDI DALI emergency integral indicator
STANDARD White — RAL 9016	DRIVER Integral LED driver	MOUNTING Vertical or horizontal wall mounting

SPECIFICATION OPTIONS

Finish, control and emergency choices for Zenith project schedules.

DOCUMENT

Technical data
REV 1 / MAY 2026

OPTIC	LIGHT	ORIGIN	WARRANTY
Opal acrylic diffuser for homogenous illumination.	Soft upward and downward output.	Manufactured in the UK.	5 year warranty statement.