

EMERGENCY LIGHTING / TRACK-MOUNTED / NON-MAINTAINED





# Safe Emergency

Track-mounted emergency module with LiFePO4 batteries and optional self-test / DALI.

Safe Emergency is listed for 3 hour non-maintained emergency operation with 254 lumen output and compatibility with Global Trac, Stucchi and Eutrac systems.

The source file lists white as standard, black finish option, long-life LiFePO4 batteries and a DALI / self-test option with Stucchi adaptor.




 <p><b>3 hour non-maintained</b> The source sheet lists 3 hour non-maintained emergency operation.</p>	 <p><b>Track compatible</b> The unit is listed as compatible with Global Trac, Stucchi and Eutrac systems.</p>	 <p><b>Self-test / DALI</b> The source sheet lists /EMD as an option.</p>	 <p><b>LiFePO4 batteries</b> Long-life LiFePO4 batteries are listed in the source file.</p>
---	---	--	--

## Key Features

- + 3 hour non-maintained operation
- + Compatible with Global Trac, Stucchi and Eutrac systems
- + White finish as standard with black option
- + 254 lumen output
- + Long-life LiFePO4 batteries
- + DALI / self-test option available

## Technical Drawing

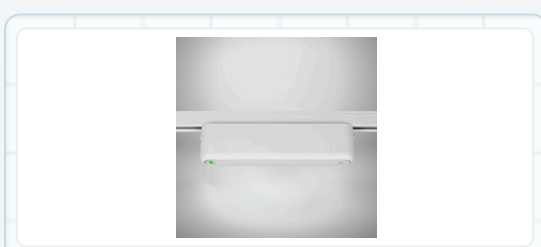




Length <b>330 mm</b>	Depth <b>50 mm</b>
Height <b>83 mm</b>	Output <b>254 lumen</b>

## Ordering Information

OUTPUT (LLM)	POWER	MODEL REF.
254	2.5	SAFEEMERGENCY_001

## Options

EMERGENCY OPTION /EMD	FINISH OPTION /BK
--------------------------	----------------------

		UK CA	CE		DC	Declaration of Conformity available
---	---	-------	----	---	----	-------------------------------------

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25 deg C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E5DE.