


RECESSED / IP54 / COMMERCIAL DOWNLIGHT

Trio

Low-profile IP54 downlight with a recessed opal diffuser for commercial interiors.

Lumi is a professional commercial downlight with a discreet 190 mm bezel, recessed opal PC diffuser and IP54 rating. The standard configuration uses an SMD LED platform powered by Tridonic and a RAL 9016 white bezel.

The product covers two model references from 1125 to 2275 luminaire lumens. Emergency, DALI, phase-cut dimming and Casambi wireless control options are available through the suffix system for project schedules.

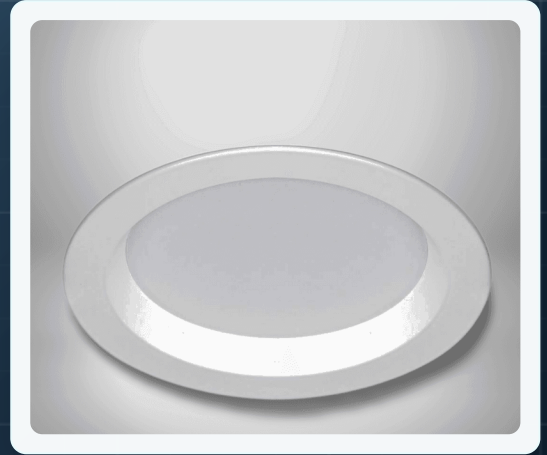

<p>IP54 rated Designed for professional commercial downlight applications.</p>	<p>Opal diffuser Recessed opal PC diffuser for a soft visible aperture.</p>	<p>Tridonic powered SMD LED platform powered by Tridonic.</p>	<p>Up to 155 lm/W Highest listed light-source efficacy in the source table.</p>	<p>50,000h L70 Long-life performance stated in the source features.</p>	<p>Controls ready Dimming, DALI and wireless network control suffix options.</p>
---	--	--	--	--	---

Key Features

- Professional IP54 commercial downlight.
- SMD LED powered by Tridonic.
- Switchable 3000K, 4000K and 5500K colour temperatures.
- Emergency, DALI, dimming and wireless network control options.
- Recessed opal PC diffuser.
- Bezel finished in RAL 9016 white.
- Long life 50,000 hours L70.
- 5 year warranty.

Dimensions

PRODUCT DRAWING

OPTIONS

DRAWING: 190 MM BEZEL, 160 MM CUT-OUT AND 46 MM MAXIMUM DEPTH.

Bezel 190 mm	Cut-out 160 mm
Depth 46 mm max	

Ordering Information

LUMINAIRE OUTPUT (LLM)	COLOUR TEMP	LUMINAIRE POWER (TCW)	LIGHT SOURCE EFFICACY (LM/W)	LUMINAIRE EFFICACY (LLM/TCW)	MODEL REF.
1125	3000K	11	146	102	TRIO.001
1200	4000K	11	155	108	TRIO.001
1200	5500K	11	155	108	TRIO.001
2050	3000K	21	146	100	TRIO.002
2275	4000K	21	155	111	TRIO.002
2200	5500K	21	155	107	TRIO.002

Options

CONTROL GEAR /MDIM, /ECO, /BTC	EMERGENCY - REMOTE INDICATOR /EM, /EMD	PRODUCT VARIATION PV - Contact Sales
--	--	--

Specification Options


Control, emergency and connector options shown in the current product data.

REV1 / MAY 2026
LL-TRIO-DS


Specification Options




/MDIM
Phase-cut mains dimming




/ECO
SwitchDIM / DALI / DSI



/BTC
Casambi wireless network inc. dimming




/EM
Emergency Remote indicator






/EMD
DALI / Self test EM Remote indicator

Product Variations



PV - Contact Sales
Choice of connectors

 **CE**  **UK CA**  **DC** Declaration of Conformity available

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25 deg C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E5DE.