

ADJUSTABLE LED DOWNLIGHT / PHILIPS INSIDE / EMERGENCY OPTIONS

Twist

Mini high output, low glare adjustable LED gimbal with Philips LED and driver system.

Twist is a fully adjustable die-cast LED mini gimbal designed for low-glare commercial downlighting with 355 degree rotation and 30 degree tilt.

The schedule lists 10, 16.5 and 27 tcW power groups, outputs from 975 to 2650 llm, premium white Ra90 LED modules, reflector options, dimming, Casambi and emergency variants.

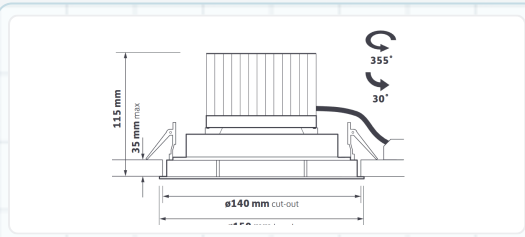


 <p>Adjustable aim 355 degree rotation and 30 degree tilt.</p>	 <p>Philips system Philips LED and driver system listed.</p>	 <p>Reflector options 24 degree standard, 12 and 40 degree options.</p>	 <p>Emergency options EM and DALI/ST emergency options listed.</p>
--	--	---	--

Key Features

- + MINI high output, low glare LED gimbal
- + Philips LED and driver system
- + 24 degree reflector as standard with 12 degree and 40 degree options
- + ETL and Part L compliant variants
- + 5 year warranty
- + Fully adjustable die cast body
- + Premium White Ra90 LED module as standard
- + No visible flicker (IEEE 1789 - 2015)
- + Life >50,000h L70/B10

Technical Drawing



DRAWING SHOWS 150 MM BEZEL, 140 MM CUT-OUT, 115 MM HEIGHT AND 35 MM MINIMUM VOID.

Bezel 150 mm	Cut-out 140 mm
Height 115 mm max	Minimum void 35 mm
Tilt / rotation 30 degree tilt / 355 degree rotation	

Ordering Information

MODEL SCHEDULE

LUMINAIRE OUTPUT (LLM)	POWER TCM	COLOUR K	MODEL REF.
975	10	3000K	TWIST.001
1050	10	4000K	TWIST.002
1650	16.5	3000K	TWIST.003
1775	16.5	4000K	TWIST.004
2450	27	3000K	TWIST.005
2650	27	4000K	TWIST.006

Options








AVAILABLE SUFFIXES






/NB 12 degree reflector	/NB 40 degree reflector	/T+DALI Touch dimming / DALI
/BTC Casambi wireless network	/EM Emergency remote indicator	/EMD DALI/ST emergency remote indicator

Specification Options

Reflector, finish, dimming, Casambi and emergency options from the options page.

Specification Options

 <p>/NB 12 degree Multi-faceted reflector</p>	 <p>/WB 40 degree Multi-faceted reflector</p>	 <p>Contact Sales Black body</p>	 <p>Touch Dimming DALI 2 /T+DALI Touch dimming / DALI</p>
 <p>/BTC Casambi Bluetooth wireless network (inc dim)</p>	 <p>/EM 3h EM conversion c/w remote indicator</p>	 <p>/EMD 3h DALI / ST EM conversion c/w remote indicator</p>	

					Declaration of Conformity available
---	---	---	---	---	-------------------------------------

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25 deg C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E5DE.