

TRACK / SPOTLIGHT / HIGH OUTPUT



Vantage

Minimalist LED track spotlight with interchangeable optical accessories and control options.

Vantage is a professional track-mounted spotlight for commercial, gallery, retail and architectural lighting where high output, tidy form and beam flexibility are required.

The range includes Vossloh LED with an in-track driver system, white finish as standard, black body option, DALI and Casambi control options, Ra90 availability and interchangeable beam accessories.




 <p>Track mounted Compatible with professional track-lighting specifications.</p>	 <p>Up to 5225 l1m Highest listed luminaire output in the ordering table.</p>	 <p>Beam options Super narrow, narrow and wide beam options are listed.</p>	 <p>Control options DALI and Casambi wireless control options available.</p>	 <p>55,000h L90 Lumen maintenance stated in the features.</p>	 <p>Accessory range Snoots, honeycomb louvre and related track accessories.</p>
---	---	---	--	---	---

Key Features

- + Professional minimalist LED track-mounted spotlight.
- + Vossloh LED and in-track driver system.
- + 15 degree, 24 degree and 60 degree lens options.
- + MacAdam colour tolerance 3 SDCM.
- + DALI and wireless control options.
- + 5 year warranty.
- + Finished in white as standard with black option.
- + 36 degree medium beam lens as standard.
- + Ra80 with Ra90 option.
- + Lumen maintenance L90 at 55,000 hours.
- + Range of interchangeable accessories available.

Dimensions

PRODUCT DRAWING

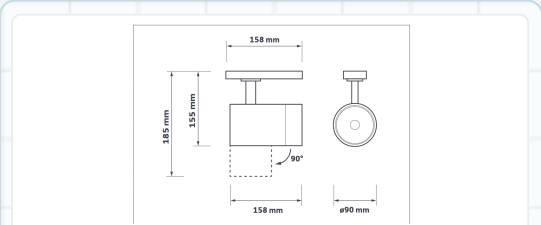

DRAWING: 158 MM BODY, 90 MM DIAMETER, 155 MM FITTING HEIGHT AND 185 MM OVERALL HEIGHT.

Body 158 mm	Diameter 90 mm
Fitting height 155 mm	Overall height 185 mm

Ordering Information

LUMINAIRE OUTPUT (LLM)	COLOUR TEMP	LUMINAIRE POWER (TCW)	LUMINAIRE EFFICACY (LLM/TCW)	MODEL REF.
1875	3000K	11.5	163	VANTAGE.001
1925	4000K	11.5	167	VANTAGE.002
2925	3000K	19.0	154	VANTAGE.003
3025	4000K	19.0	159	VANTAGE.004
4225	3000K	31.5	134	VANTAGE.005
4350	4000K	31.5	138	VANTAGE.006
5075	3000K	39.5	128	VANTAGE.007
5225	4000K	39.5	132	VANTAGE.008

Options













FINISH /BK	BEAM OPTIONS /SNB, /NB, /WB	CONTROL GEAR /DALI, /BTC
ACCESSORIES /HC, /LSW, /LSB, /ASW, /ASB		



Specification Options

REV1 / MAY 2026
LL-VANTAGE-DS

Finish, beam, colour rendering, control and snoot options available for this product.

Specification Options

 <p>/BK Black</p>	 <p>/HC Honeycomb louvre</p>	 <p>/DALI DALI control gear</p>	 <p>/BTC Casambi wireless network (inc. dim)</p>
 <p>/R Ra90 high colour rendering LED module</p>	 <p>/SNB 15 degree super narrow beam</p>	 <p>/NB 24 degree narrow beam</p>	 <p>/WB 60 degree wide beam</p>
 <p>/LSW Long snoot White</p>	 <p>/LSB Long snoot Black</p>	 <p>/ASW Asymmetric adjustable snoot - White</p>	 <p>/ASB Asymmetric adjustable snoot - Black</p>

	CE	UK CA		DC	Declaration of Conformity available
---	----	----------	---	----	-------------------------------------


Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25 deg C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E5DE.

Related Products


Related products and accessories available for this product.

REV1 / MAY 2026
LL-VANTAGE-DS


Related Products




Focal Track
64 mm track spotlight




Iris Track
Zoom snoot




Shapex Track
Framing projector








VANTAGE . ACC . 01
Track and accessories



VANTAGE . ACC . 02
Wireless Casambi single wall switch



VANTAGE . ACC . 03
Wireless Casambi twin wall switch

     Declaration of Conformity available

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25 deg C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E5DE.