

EXIT SIGNS / WALL MOUNTED / MAINTAINED OR NON-MAINTAINED

Wall Mounted Exit Sign

Wall-mounted double-sided LED exit sign with EU and ISO legend options.

This wall-mounted exit sign is listed for maintained or non-maintained operation with 15 high-intensity LEDs and a compact lamp and gear housing.

The governing product file lists brushed aluminium finish, 3 hour duration, EU and ISO legend panels, and a DALI / self-test option.

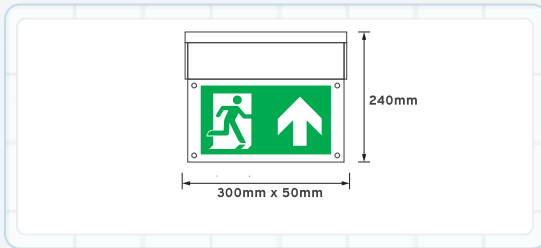


 <p>3 hour duration Rated emergency duration is listed as 3 hours.</p>	 <p>EU and ISO legends Double-sided acrylic panels are listed for EU and ISO signage.</p>	 <p>DALI / self-test The source sheet lists /EMD as an available option.</p>	 <p>Wall mounted Wall bracket arrangement is shown in the source file.</p>
--	---	--	--

Key Features

- Maintained or non-maintained operation
- Double-sided acrylic legend panels for EU signage
- Custom designed signage available
- DALI / self-test option available
- 15 high-intensity LEDs for bright, even legend illumination
- ISO signage also available
- Supplied with arrow-down legend panel as standard
- Compact lamp and gear housing

Technical Drawing









Legend panel 240 mm	Body 288 mm
Housing 300 mm x 50 mm	

Ordering Information

FINISH	DURATION	RECHARGE	LIFETIME	MODEL REF.
Brushed aluminium	3 hours	24 hours	50,000 hours	WALLMOUNTEDEXITSIGN.001

Options

CONTROL /EMD	EU LEGENDS LXSLR, LXSUP	ISO LEGENDS LXSAD/ISO, LXSLR/ISO, LXSUP/ISO
------------------------	-----------------------------------	---







 Declaration of Conformity available

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25 deg C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E5DE.