

WALL MOUNTED / DECORATIVE / BIDIRECTIONAL

Zenith

Decorative LED wall light with soft upward and downward illumination.

Zenith is a decorative LED wall light for indoor architectural and accent applications where soft bidirectional illumination and a simple wall-mounted form are required.

The opal acrylic diffuser provides homogenous illumination, while the range supports vertical or horizontal mounting, integral LED driver configuration, DALI, wireless control and emergency options.



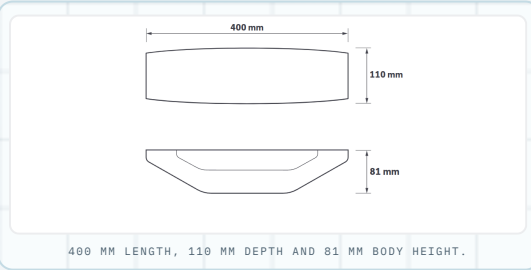
| | | | | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>Bidirectional wall light Soft upward and downward light output for architectural wall-mounted schemes.</p> |  <p>Opal acrylic diffuser Diffuser construction is listed for homogenous illumination.</p> |  <p>>72,000h L80/B10 Long-life LED platform for commercial project schedules.</p> |  <p>Control ready SwitchDIM, DALI, DSI, Casambi and emergency suffix options are listed.</p> |  <p>Finish options White RAL 9016 as standard, with black RAL 9005 and grey RAL 9006 options.</p> |  <p>UK manufactured Manufactured in the UK.</p> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|

Key Features

- + Decorative LED wall light with bidirectional light output.
- + Mount vertically or horizontally.
- + Life >72,000 hours L80/B10.
- + White RAL 9016 as standard.
- + Short circuit, overload and temperature protection.
- + Opal acrylic diffusers for homogenous illumination.
- + Integral LED driver.
- + DALI, wireless control and emergency options.
- + Black RAL 9005 and grey RAL 9006 options.
- + 5 year warranty.

Dimensions

PRODUCT DRAWING



400 MM LENGTH, 110 MM DEPTH AND 81 MM BODY HEIGHT.

| | |
|-----------------------------|---------------------------------------------------------|
| Length 400 mm | Depth 110 mm |
| Body height 81 mm | Mounting Vertical or horizontal wall mounting |

Ordering Information

MODEL REFERENCES

| LUMINAIRE OUTPUT (LLM) | COLOUR TEMP | LUMINAIRE POWER (TCW) | LUMINAIRE EFFICACY (LLM/TCW) | MODEL REF. |
|------------------------|-------------|-----------------------|------------------------------|-------------------|
| 825 11m | 3000K | 9 tcW | 92 11m/tcW | ZENITH.001 |
| 875 11m | 4000K | 9 tcW | 97 11m/tcW | ZENITH.002 |
| 1550 11m | 3000K | 16 tcW | 97 11m/tcW | ZENITH.003 |
| 1625 11m | 4000K | 16 tcW | 102 11m/tcW | ZENITH.004 |
| 2200 11m | 3000K | 24 tcW | 92 11m/tcW | ZENITH.005 |
| 2325 11m | 4000K | 24 tcW | 97 11m/tcW | ZENITH.006 |







Options

| | | |
|-----------------------------------------------------------------|-----------------------------------|------------------------------------------------------|
| FINISH OPTIONS /BK, /GY | CONTROL GEAR /ECO, /BTC | EMERGENCY - INTEGRAL INDICATOR /EMI, /EMDI |
| PRODUCT VARIATIONS Any RAL colour, coloured diffusers | | |



Specification Options

Finish, control, emergency and product variation choices for Zenith project schedules.

Options

| | | |
|------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>/BK Black - RAL 9005</p> |  <p>/GY Grey - RAL 9006</p> |  <p>/ECO SwitchDIM / DALI / DSI</p> |
|  <p>/BTC Casambi wireless network inc. dimming</p> |  <p>/EMI Emergency Integral Indicator</p> |  <p>/EMDI DALI emergency Integral Indicator</p> |

PV - Product Variations

| | |
|-----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>PV - Contact Sales Any RAL colour</p> |  <p>PV - Contact Sales Coloured diffusers</p> |
|-----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|

| | | | | | | |
|--|--|----------|----|--|----|-------------------------------------|
| | | UK CA | CE | | DC | Declaration of Conformity available |
|--|--|----------|----|--|----|-------------------------------------|

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25 deg C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E5DE.