

# INSTALLATION GUIDE:

237mm LED DOWNLIGHT  
990.0249.02




## IMPORTANT:

The luminaire must not be covered by any debris or insulating material. Ensure there is a minimum of 50mm airspace around the luminaire and control gear. Electrical termination must be carried out by a qualified electrician in accordance with the latest edition of IEE wiring regulations BS7671. The LED modules in this Luminaire are non-user replaceable.

### A




**ISOLATE MAINS SUPPLY BEFORE COMMENCING INSTALLATION**



- Cut a 222mm diameter hole at the desired location using a hole saw.


### B

**TO AVOID DAMAGE, PLEASE WEAR GLOVES WHEN HANDLING THE REFLECTOR.**




- Remove the reflector by carefully pushing it away from the LED module.

### C

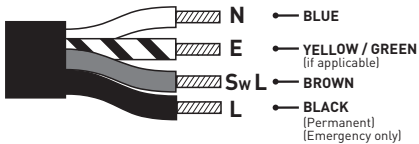


- Connect the luminaire to the mains supply using a terminal block (not supplied) compliant with the requirements of EN60998-2-1 or 2-2.
- For Switch Dim or DALI wiring see instruction leaflet **990.0009.01**.

### D

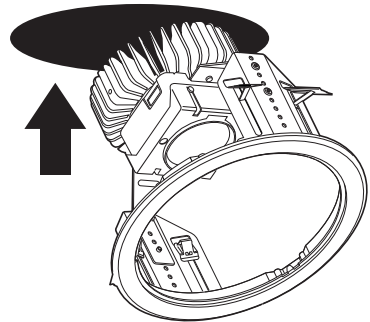


- Offer luminaire into cut-out.

### E

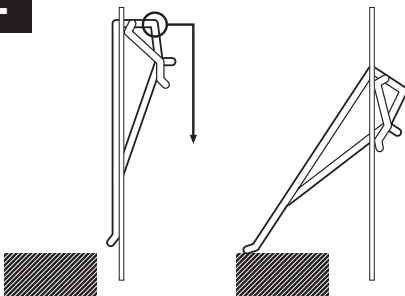

- Lock the luminaire in place by means of the four adjustable fixing springs as illustrated above.

### F



- Locate the reflector onto the LED module.
- Attach accessory to secure the reflector.



**REINSTATE MAINS SUPPLY**