

146 Series Datasheet

TRIDONIC
TECHNOLOGY
INSIDE


LUMEN LOOP





Key Features

- ▶ Decorative glass LED luminaire
- ▶ Semi-opaque glass diffuser with subtle marbling effect
- ▶ Polished chrome fixings
- ▶ Tridonic CLE board and driver system for optimum performance
- ▶ Dimming options
- ▶ Short circuit, overload and temperature protection
- ▶ Life >72,000 hours L80 F10

Technical Drawing

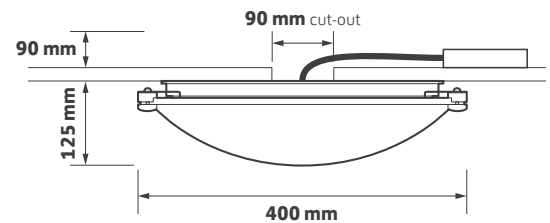

With spacer for mounting on solid surfaces.

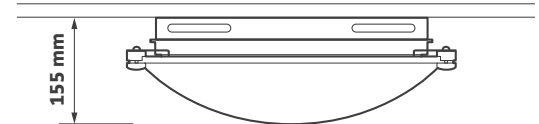

Ordering Information

Luminaire Output lm	Power tcW	Colour	Model Ref.
1725	15	830	146.001
1700	15	840	146.002

Options


Please select from the options below.

SwitchDIM, DALI or DSI	/ECO
Single Point Connection to an ILEM product	/SPC
Spacer for solid surfaces	SCR146


Options




SCR146
Spacer for solid surfaces

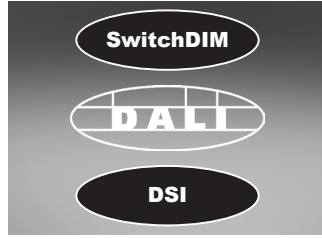

/ECO
SwitchDIM, DALI or DSI

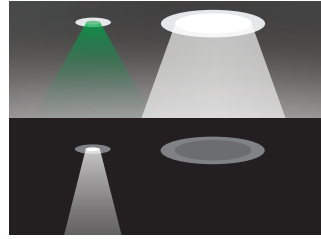

ILEM
Please see ILEM datasheet

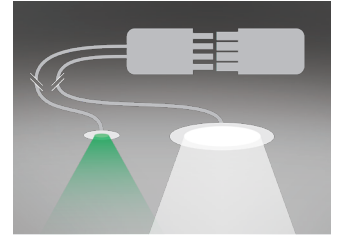

/SPC
Single Point Connection to an ILEM product