





225 mm

Key Features

- ▶ Fully adjustable single LED surface mounted framelight
- ▶ Twin version available
- ▶ Medium beam multi-faceted reflector as standard
- ▶ Paired with Tridonic system for outstanding efficacy
- ▶ Beam angle and colourway options
- ▶ Two gimbal fixing positions for added flexibility
- ▶ Excellent luminaire efficacy of up to 112.9 lm/W
- ▶ Life up to >60,000 hours (L70 / F10)

Technical Drawing

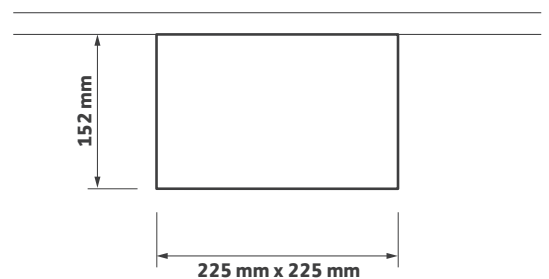

Ordering Information

Output (Lm)	Power (tcW)	Colour	Model Ref.
1025	10	830	160.001
1025	9	840	160.002
2000	19	830	160.003
2000	18	840	160.004
3000	31	830	160.005
3000	29	840	160.006

Options

Please select from the options below.

Black body and gimbal	/BK
SwitchDIM, DALI or DSI	/ECO
Narrow beam	/NB
Wide beam	/WB
High colour rendering option (Ra 90)	/R9


Options



/NB
Narrow beam reflector



/WB
Wide beam reflector



/ECO
SwitchDIM, DALI or DSI



/R9
High colour rendering (Ra 90)



/BK
Black body and gimbal

Also Available



Product variations
Other colours and specifications
available on request



Twin available
See 161 Series



Recessed available
See 121 Series