


164 Series Datasheet

TRIDONIC
TECHNOLOGY
INSIDE



LUMEN LOOP

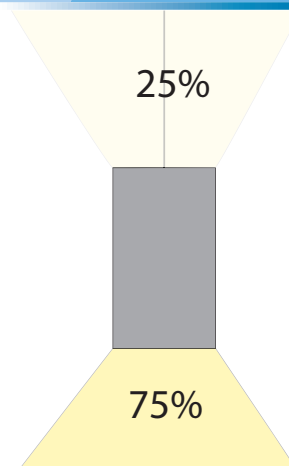

Key Features

- ▶ Extruded direct/indirect linear profile luminaire
- ▶ Typical percentage output ratio 75 : 25
- ▶ Finished in RAL 9006 grey as standard
- ▶ Available in 3 standard lengths
- ▶ Delivering approx. 3000lm per meter as standard
- ▶ Coloured matched, injection moulded end caps
- ▶ TPa opal lens for feature, general and visual areas
- ▶ Low glare prismatic lens available for office and LG7 compliance
- ▶ Tridonic low energy LED and driver system
- ▶ Lumen maintenance L80/F10 @ >72,000 hours
- ▶ Efficacy up to 130 llm/tcW
- ▶ Manufactured in the U.K.
- ▶ 2 m suspension kit

Technical Drawing

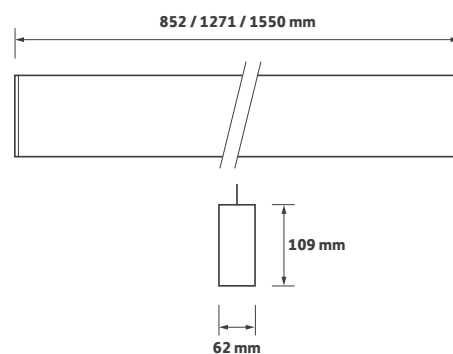

Ordering Information

Length	Colour	Luminaire	Model Ref.	Luminaire	Luminaire
		Output (llm) Std		Output (llm) /LO	Output (llm) /HO
850 mm	830	2300	164.001	1550	3650
850 mm	840	2400	164.002	1625	3825
1.2 m	830	3450	164.003	2325	5475
1.2 m	840	3600	164.004	2450	5725
1.5 m	830	4450	164.005	3000	7050
1.5 m	840	4650	164.006	3150	7375

For longer lengths, see 174 Series

Options

Please select from the options below.

White body	/WH
Black body	/BK
Lower output	/LO
Higher output	/HO
Low glare prismatic lens for LG7 compliance	/LG
SwitchDIM, DALI or DSI	/ECO
EM conversion (not 164.001 / 164.002)	/EMI
Butt joints	/BU

164 Series Options and Accessories

LUMENLOOP


Options




/WH
White body




/BK
Black body



/LO
Lower output




/HO
Higher output



/ECO
SwitchDIM, DALI or DSI



/EMI
EM conversion (not 164.001 / 164.002)



/LG
Low glare prismatic lens

Also Available




BU.164/180
180° Butt joint bracket




BU.164/90
90° Butt joint bracket



Product variations
Other colours and specifications
available on request



Product variations
Custom body colours



Product variations
Custom colours



PT001
Diffuser removal tool