

178 Series Datasheet

TRIDONIC
TECHNOLOGY
INSIDE



LUMEN LOOP



Key Features

- ▶ 600 x 600 lay-in LED panel powered by Tridonic
- ▶ Low glare UGR <19 for LG7 compliance
- ▶ Part L and ETL compliant efficacies
- ▶ Lumen maintenance up to L80/F10 @ 50,000 hours
- ▶ Self-extinguishing TP(a) diffuser option
- ▶ DALI, dimming and EM options
- ▶ 5 year warranty

Technical Drawing

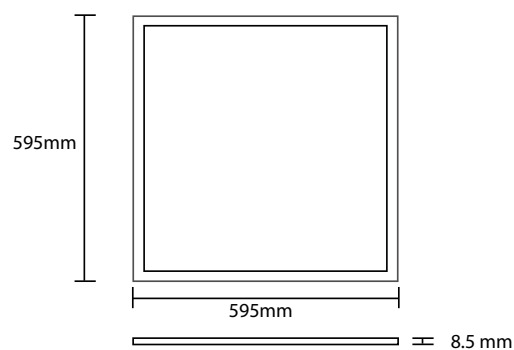

Ordering Information

Luminaire Output lm	Power tcW	Colour	Model Ref.
2700	26.5	830	178.001
3100	26.0	840	178.002
3600	36.5	830	178.003
3900	34.5	840	178.004


Options

TP(a) Diffuser	/TPA
SwitchDIM, DALI or DSI	/ECO
100,000 hr Tridonic Excite driver	/TOP
Emergency conversion	/EM
DALI Emergency	/EMD
Casambi Bluetooth wireless network (inc dim)	/BTC
Surface mounting kit	SURF.178
Suspension kit	SUS.178/1.2M
Plasterboard mounting kit	PBF.178


178 Series Options and Accessories

LUMENLOOP


Options

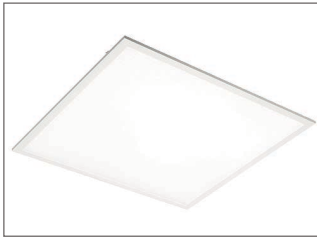


/TPA
TP(a) Diffuser

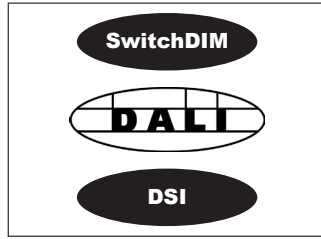


/ECO
SwitchDIM + DALI + DSI

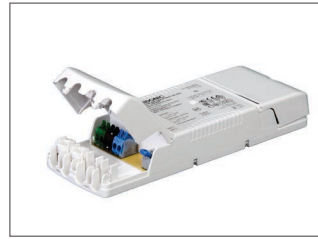

/TOP
Tridonic Excite Driver - 100K hours
I-Select, Loop in - loop out

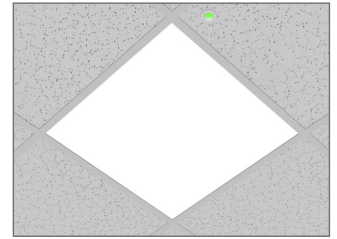

/EM
3 hour EM

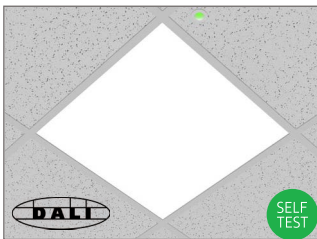


/EMD
DALI 3 hour EM conversion




SURF.178
Surface mount frame



PBF.178
Plasterboard mounting kit

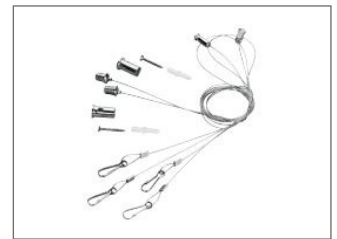

SUS.178/1.2M
Wire suspension kit

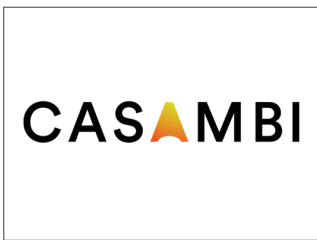

/BTC
Casambi Bluetooth wireless network
(inc dim)