

179 Series Datasheet

PHILIPS
TECHNOLOGY
INSIDE

LUMEN LOOP





ø150 mm

Key Features

- ▶ MINI high output, low glare LED scoop
- ▶ Fully adjustable die cast body
- ▶ Philips LED and driver system
- ▶ Premium White Ra90 LED module as standard
- ▶ 24° reflector as standard with 12° and 40° options
- ▶ No visible flicker (IEEE 1789 - 2015)
- ▶ ECA and Part L compliant variants
- ▶ Life >50,000h L70/B10
- ▶ 5 year warranty

Technical Drawing

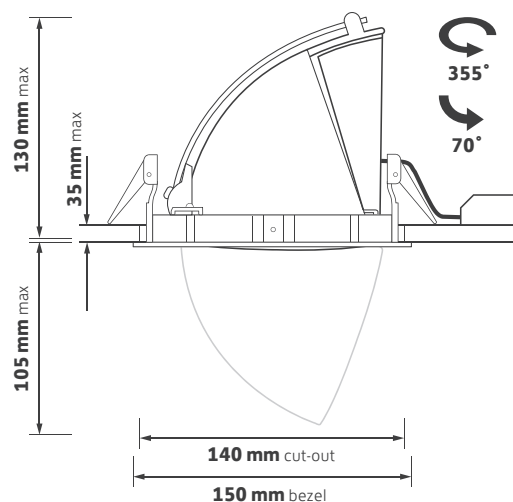

Ordering Information

Luminaire Output lm	Power tcW	Colour	Model Ref.
975	10	930	179.001
1050	10	940	179.002
1650	16	930	179.003
1775	16	940	179.004
2450	27	930	179.005
2625	27	940	179.006

Options

Please select from the options below.

12° Multi- faceted reflector	/NB
40° Multi- faceted reflector	/WB
Touch dimming / DALI	/T+DALI
Casambi wireless network (inc dim)	/BTC
Emergency (remote indicator)	/EM
DALI Emergency (remote indicator)	/EMD

179 Series Options and Accessories

LUMENLOOP


Options



/NB
12° narrow beam reflector



/WB
40° wide beam reflector

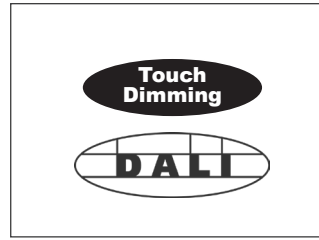

T+DALI
Touch dimming / DALI



/BTC
Casambi wireless network
(inc dim)



/EM
EM conversion



/EMD
DALI and self test EM conversion