





## Key Features

- ▶ Mini Commercial IP54 Downlight
- ▶ Low glare specular reflector
- ▶ SMD LED powered by Tridonic
- ▶ Die cast heatsink and RAL9016 bezel
- ▶ Long life 50,000h L70
- ▶ Switchable 3 x CCT 830, 840, 855
- ▶ Dimming, DALI and EM options

## Technical Drawing

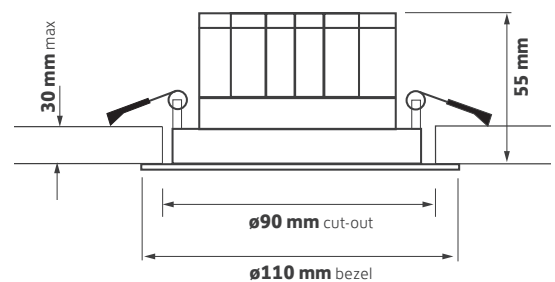

## Ordering Information

Delivered Output (lm)	Absolute Power (tcW)	Colour Temperature K	Model Reference
675	9	3000, 4000, 5500	<b>35.001</b>

## Options


Please select from the options below.

Mains dimming	<b>/MDIM</b>
SwitchDIM, DALI or DSI	<b>/ECO</b>
Casambi wireless network	<b>/BTC</b>
EM conversion	<b>/EM</b>
DALI and self test EM conversion	<b>/EMD</b>


# 35 Series Options and Accessories

LUMENLOOP


## Options




**/MDIM**  
Phase-cut mains dimming



**/ECO**  
SwitchDIM, DALI or DSI



**/BTC**  
Casambi wireless network  
(inc dim)



**/EM**  
3 hour emergency conversion



**/EMD**  
3 hour self-test and DALI emergency  
conversion