

36 Series

Data Sheet




LUMENLOOP



KEY FEATURES

- Professional IP54 commercial downlight
- Recessed opal PC diffuser
- SMD LED powered by Tridonic
- Bezel finished in RAL 9016 white
- Switchable 3 x CCT - 830 / 840 / 856
- Long life 50,000 h L70
- Emergency, DALI, dimming and wireless network control options
- 5 year warranty

DIMENSIONS

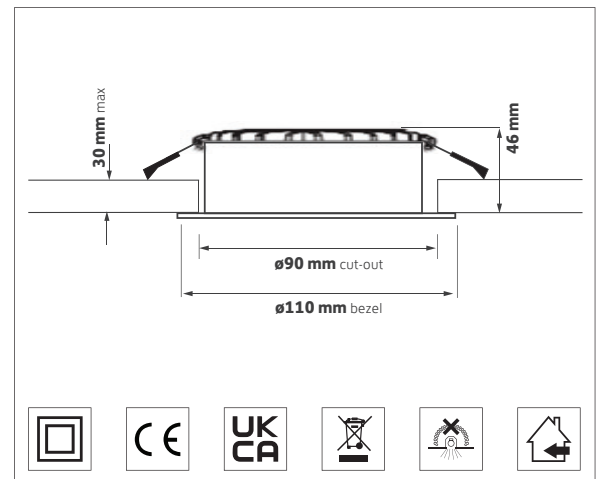

ORDERING INFORMATION

Luminaire output (lm)	Colour temp (switchable)	Luminaire power (tcW)	Light source efficacy (lm/W)	Luminaire efficacy (lm/tcW)	Model ref.
750	830	9	121	82	
850	840	9	137	92	36.001
775	855	9	127	86	

OPTIONS

Options	Suffix
Control gear	/MDIM, /ECO, /BTC
Emergency - Remote indicator	/EM, /EMD


36 Series

Options & accessories




Made in the UK

LUMENLOOP



/MDIM

Phase-cut mains dimming



/ECO

SwitchDIM / DALI / DSI



/BTC

Casambi wireless network inc. dimming



/EM

Emergency Remote indicator



/EMD

DALI / Self test EM Remote indicator

PV - PRODUCT VARIATIONS



PV - Contact Sales

Choice of connectors

RELATED PRODUCTS



See 37 Series

190 mm downlight



See 39 Series

228 mm downlight