

# 36 Series

## Data Sheet




LUMENLOOP



### KEY FEATURES

- Professional IP54 commercial downlight
- Recessed opal PC diffuser
- SMD LED powered by Tridonic
- Bezel finished in RAL 9016 white
- Switchable 3 x CCT - 830 / 840 / 856
- Long life 50,000 h L70
- Emergency, DALI, dimming and wireless network control options
- 5 year warranty

### DIMENSIONS

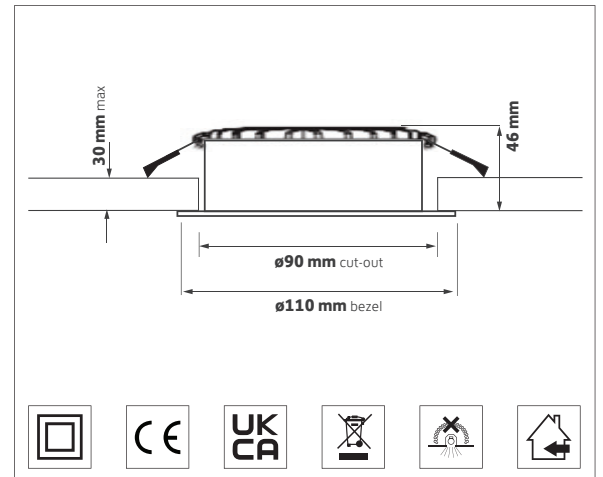

### ORDERING INFORMATION

Luminaire output (lm)	Colour temp (switchable)	Luminaire power (tcW)	Light source efficacy (lm/W)	Luminaire efficacy (lm/tcW)	Model ref.
750	830	9	121	82	
850	840	9	137	92	<b>36.001</b>
775	855	9	127	86	

### OPTIONS

Options	Suffix
Control gear	<b>/MDIM, /ECO, /BTC</b>
Emergency - Remote indicator	<b>/EM, /EMD</b>


# 36 Series

## Options & accessories




Made in the UK

LUMENLOOP



**/MDIM**

Phase-cut mains dimming



**/ECO**

SwitchDIM / DALI / DSI



**/BTC**

Casambi wireless network inc. dimming



**/EM**

Emergency Remote indicator



**/EMD**

DALI / Self test EM Remote indicator

## PV - PRODUCT VARIATIONS



**PV - Contact Sales**

Choice of connectors

## RELATED PRODUCTS



**See 37 Series**

190 mm downlight



**See 39 Series**

228 mm downlight