


37 Series


Data Sheet

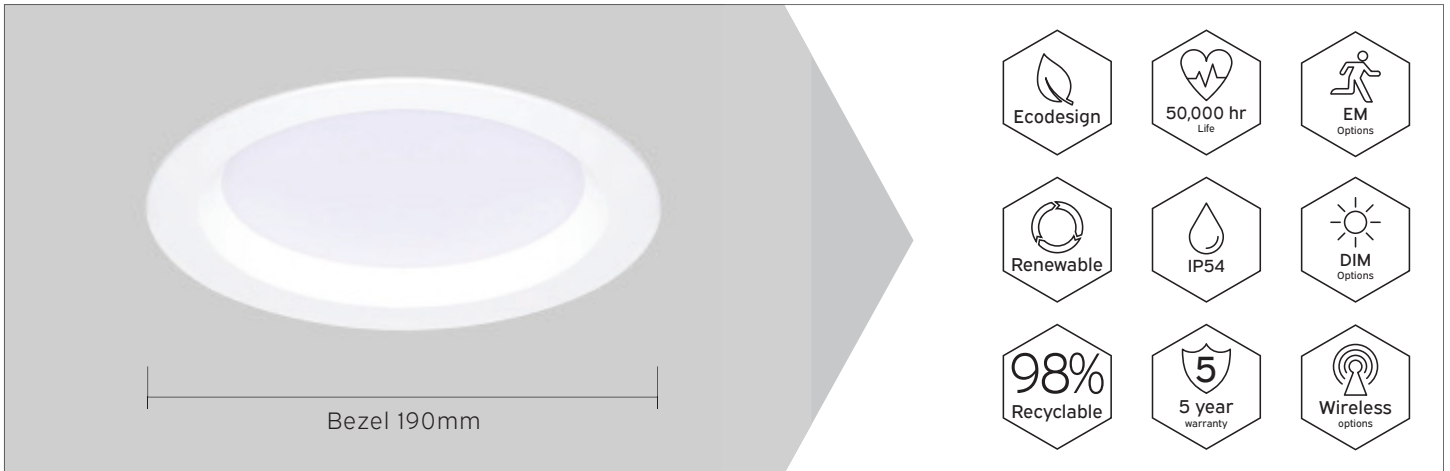

KEY FEATURES

- Professional IP54 commercial downlight
- Recessed opal PC diffuser
- SMD LED powered by Tridonic
- Bezel finished in RAL 9016 white
- Switchable 3 x CCT - 830 / 840 / 855
- Long life 50,000 h L70
- Emergency, DALI, dimming and wireless network control options
- 5 year warranty

DIMENSIONS

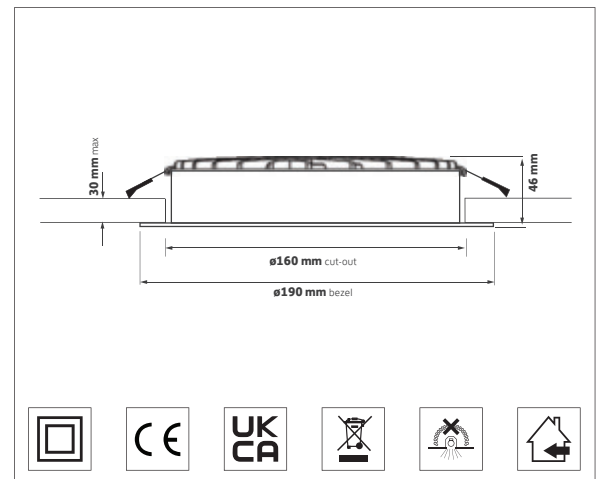

ORDERING INFORMATION

Luminaire output (lm)	Colour temp (switchable)	Luminaire power (tcW)	Light source efficacy (lm/W)	Luminaire efficacy (lm/tcW)	Model ref.
1125	830	11	146	102	
1200	840	11	155	108	37.001
1200	855	11	155	108	
2050	830	21	146	100	
2275	840	21	155	111	37.002
2200	855	21	155	107	

OPTIONS

Options	Suffix
Control gear	/MDIM, /ECO, /BTC
Emergency - Remote indicator	/EM, /EMD


37 Series

Options & accessories




Made in the UK

LUMENLOOP



/MDIM

Phase-cut mains dimming



/ECO

SwitchDIM / DALI / DSI



/BTC

Casambi wireless network inc. dimming



/EM

Emergency Remote indicator



/EMD

DALI / Self test EM Remote indicator

PV - PRODUCT VARIATIONS



PV - Contact Sales

Choice of connectors

RELATED PRODUCTS



See 36 Series

110 mm downlight



See 39 Series

228 mm downlight