





Key Features

- ▶ IP54 IK10 LED Bulkhead
- ▶ 180° light distribution
- ▶ Opal TP(a) polycarbonate diffuser
- ▶ SMD LED and integral driver
- ▶ Life 50,000h L70
- ▶ Switchable 3 x CCT 830, 840, 855
- ▶ Suitable for ceiling or wall mounting

Technical Drawing

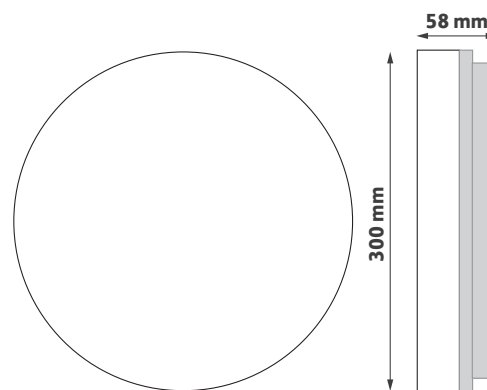

Ordering Information

Delivered Output (lm)	Absolute Power (tcW)	Colour Temperature K	Model Reference
2700	25	3000, 4000, 5500	38.001

If you require **EM** or **sensor** options, please refer to our 109 or 167 series bulkheads.